



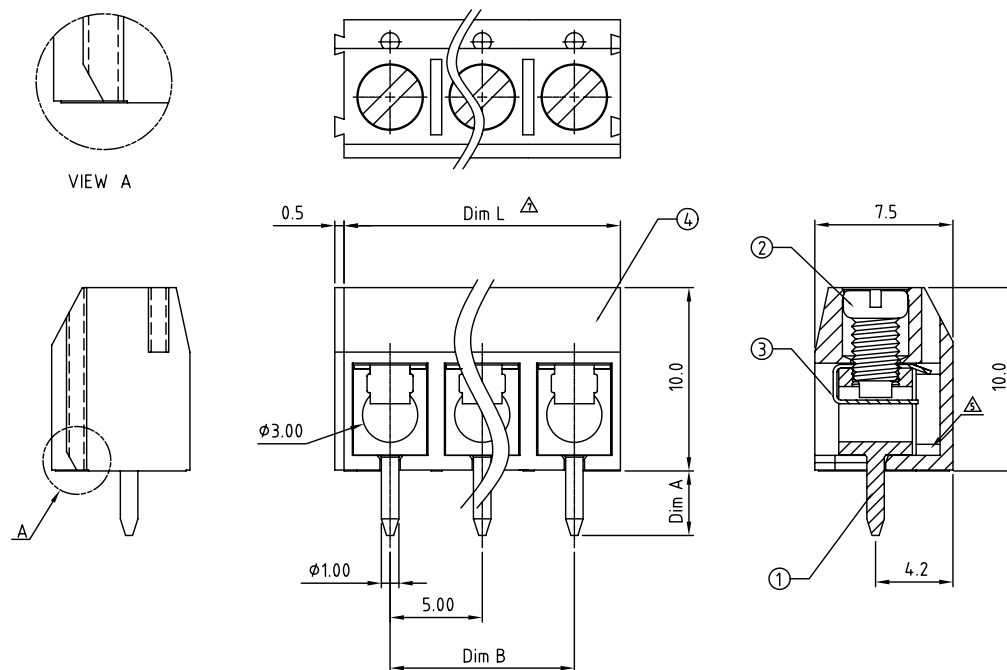

N = Number of poles
 Dim L = $N \times 5.0$ Δ
 Dim B = $(N-1) \times 5.0$

	Dim L	Dim B
2-6p	± 0.15	± 0.10
7-12p	± 0.20	± 0.20
13-18p	± 0.30	± 0.25
19-24p	± 0.40	± 0.30

N=Number of contacts

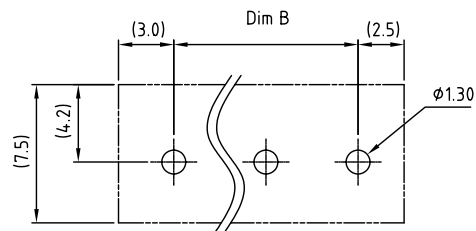

RECOMMENDED PCB LAYOUT

Material

- Item① Terminal body(metal housing): Brass(CuZn),Tin plated
- Item② Terminal screw: Steel Zinc plating
- Item③ Wire guard: Stainless steel
- Item④ Insulator (housing): Thermoplastic (UL94V-0)

- Δ Electrical cULus//VDE
 - Voltage rating: 300VAC/250VAC
 - Current rating: 15A/17.5A
- Δ ● Wire range: 0.5-1.5mm²
- Solid wire(AWG): 14-22/14-22
- Δ ● Stranded wire(AWG): 14-22/14-22
- Torque: 2.6Lb-In/0.4Nm
- Screw: M2.6
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2KV
- Operating temperature: -40°C to +115°C
- Δ ● Soldering temperature: 250°C $\pm$ 10°C/5 Sec
- SAFETY APPROVAL DETA:

RoHS Compliant

Taicom TBV8xxAG-1

Title : 5.00mm Solid Block Type Series (2P - 24P)

Tolerance (Unless Specified) :

x. = ± 0.50
 x.x = ± 0.30
 x.xx = ± 0.10

Dim : (mm)

Angle :