

ELM6472-4PS

C-Band Internally Matched FET

● FEATURES

High Output Power: P_{1dB}=36.0dBm (Typ.)

High Gain: G_{1dB}=11.0dB (Typ.)

High PAE: η_{add} =36% (Typ.)


Frequency Band: 6.4~7.2GHz

Internally matched

Plastic Package for SMT applications

● DESCRIPTION

The ELM6472-4PS is a power GaAs FET that is internally matched for standard communication bands to provide optimum power and gain.

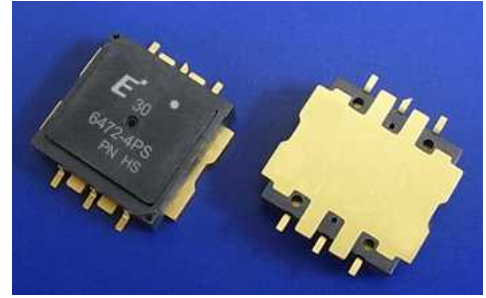

ABSOLUTE MAXIMUM RATING (Case Temperature T_c=25 deg-C)

Item	Symbol	Rating	Unit
Drain-Source Voltage	V _{DS}	15	V
Gate-Source Voltage	V _{GS}	-5	V
Total Power Dissipation	P _T	27.3	W
Storage Temperature	T _{STG}	-40 to +125	deg-C
Channel Temperature	T _{CH}	175	deg-C

RECOMMENDED OPERATING CONDITION (Case Temperature T_c=25 deg-C)

Item	Symbol	Condition	Limit	Unit
DC Input Voltage	V _{DS}		<10	V
Forward Gate Current	I _{GF}	R _G =100 ohm	< +16	mA
Reverse Gate Current	I _{GR}	R _G =100 ohm	> -2.2	mA
Channel Temperature	T _{CH}		155	deg-C

ELECTRICAL CHARACTERISTICS (Case Temperature T_c=25 deg-C)

Item	Symbol	Condition	Limit			Unit
			Min.	Typ.	Max.	
Drain Current	I _{DSS}	V _{DS} =5V, V _{GS} =0V	-	1700	2600	mA
Trans conductance	gm	V _{DS} =5V, I _{DS} =1100mA	-	1700	-	mS
Pinch-off Voltage	V _P	V _{DS} =5V, I _{DS} =85mA	-0.5	-1.5	-3.0	V
Gage-Source Breakdown Voltage	V _{GSO}	I _{GS} =85uA	-5.0	-	-	V
Output Power at 1dB G.C.P.	P _{1dB}	V _{DS} =10V I _{ds(DC)} =0.65I _{DSS} (typ.) f=6.4~7.2 GHz	35.0	36.0	-	dBm
Power Gain at 1dB G.C.P.	G _{1dB}		9.5	11.0	-	dB
Drain Current	I _{dsr}		-	1100	1300	mA
Power added Efficiency	N _{add}		-	36	-	%
Gain Flatness	ΔG		-	-	1.2	dB
3 rd Order Inter modulation Distortion	IM ₃	f=7.2GHz Δf=10MHz, 2-tone Test P _{out} =25.5dBm (S.C.L)	-40	-43	-	dBc
R _{th}	R _{th}	Channel to Case	-	4.5	5.5	Deg-C/W
ΔT _{ch}	ΔT _{ch}	10V x I _{dsr} x R _{th}	-	-	71.5	Deg-C

Eudyna

ELM6472-4PS

C-Band Internally Matched FET

CASE STYLE: I2C

ESD	Class 3 A	4000-8000V
MSL	2A	4 weeks after open the package

Ordering Information

Model Type	MOQ	MOU	Packing Style
ELM6472-4PS	15pcs	15pcs	15pcs Tray
ELM6472-4PST	500pcs	500pcs	24mm width Tape (500pcs/Reel)

*MOQ stands for Minimum Order Quantity.

*MOU stands for Minimum Order Unit size.

Note


- This device will not be delivered with test data but tested pass/fail 100% against DC and RF specifications.
- NO liquid cleaning process is suitable for this device. (including de-ionized water or solvent)

ELM6472-4PS

C-Band Internally Matched FET


- RF Characteristics

Power Derating Curve

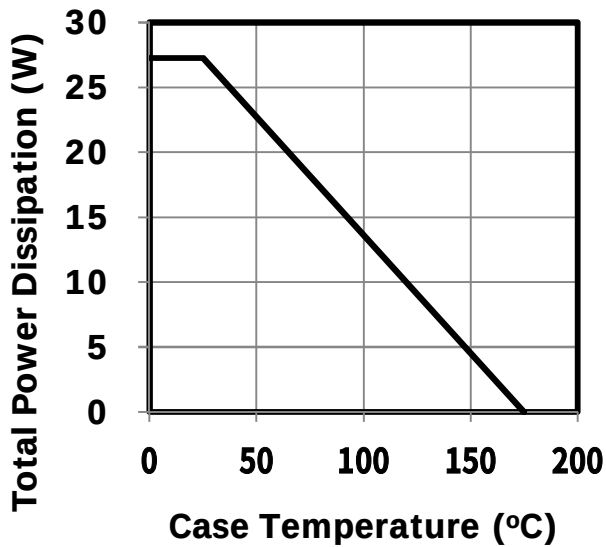


Input Power vs. Output Power, Power Added Efficiency

$V_{DS}=10V$, $I_{DS(DC)}=1100mA$

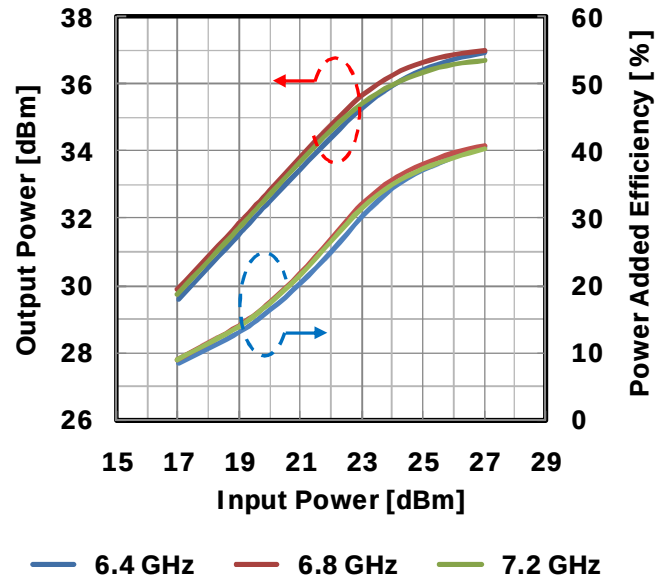

Output Power vs. Frequency


$V_{DS}=10V$, $I_{DS(DC)}=1100mA$

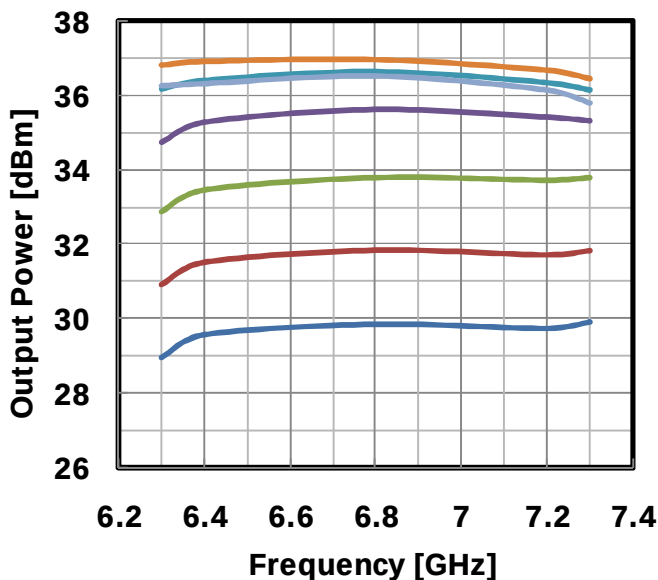

— 17 dBm — 19 dBm — 21 dBm — 23 dBm
— 25 dBm — 27 dBm — P1dB

IMD vs. Output Power

$V_{DS}=10V$, $I_{DS(DC)}=1100mA$

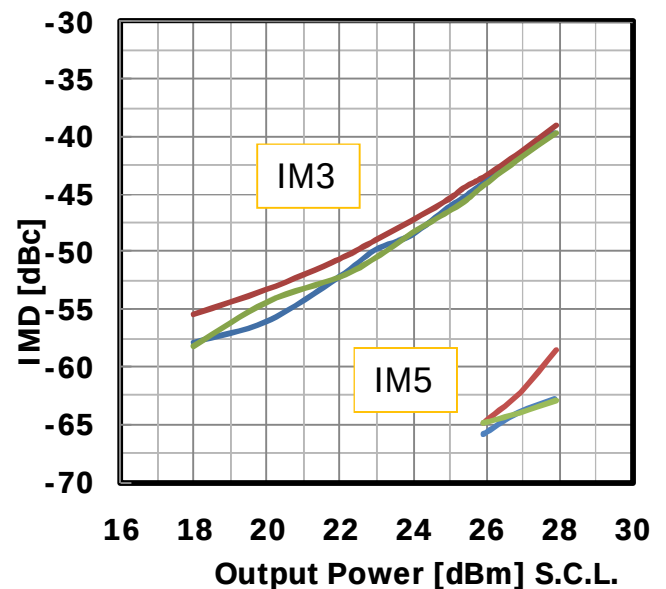

— 6.4 GHz — 6.8 GHz — 7.2 GHz


Eudyna

ELM6472-4PS

C-Band Internally Matched FET


Input Power vs. Output Power, Power Added Efficiency by Drain Voltage

$I_{DS(DC)} = 1100\text{mA}$ @6.4GHz

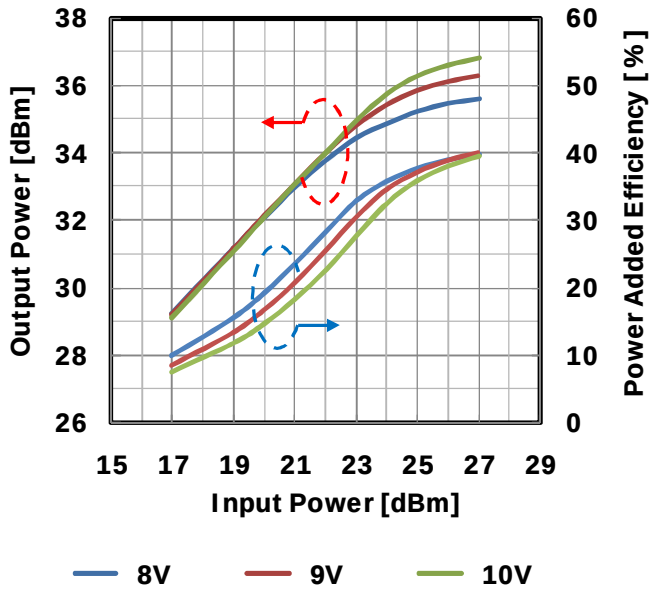


Input Power vs. Output Power, Power Added Efficiency by Drain Voltage

$I_{DS(DC)} = 1100\text{mA}$ @6.8GHz

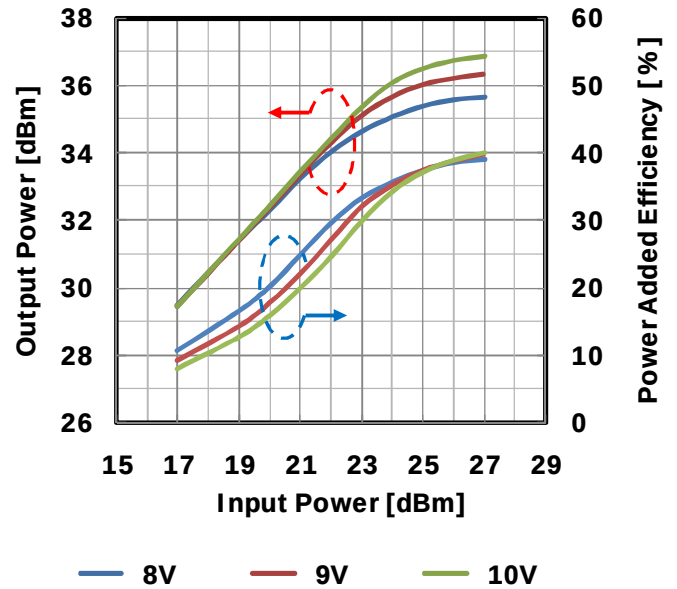

Input Power vs. Output Power, Power Added Efficiency by Drain Voltage

$I_{DS(DC)} = 1100\text{mA}$ @7.2GHz

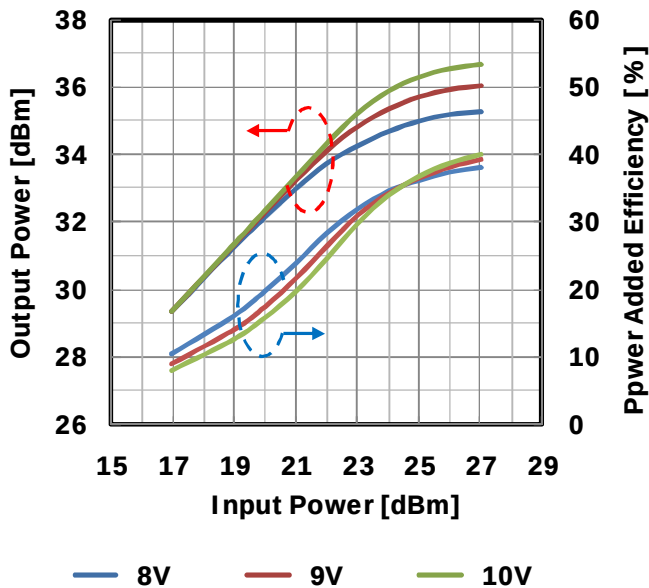


ELM6472-4PS

C-Band Internally Matched FET


Input Power vs. Output Power, Power Added Efficiency by Quiescent Drain Current

$V_{DS}=10V$ @6.4GHz

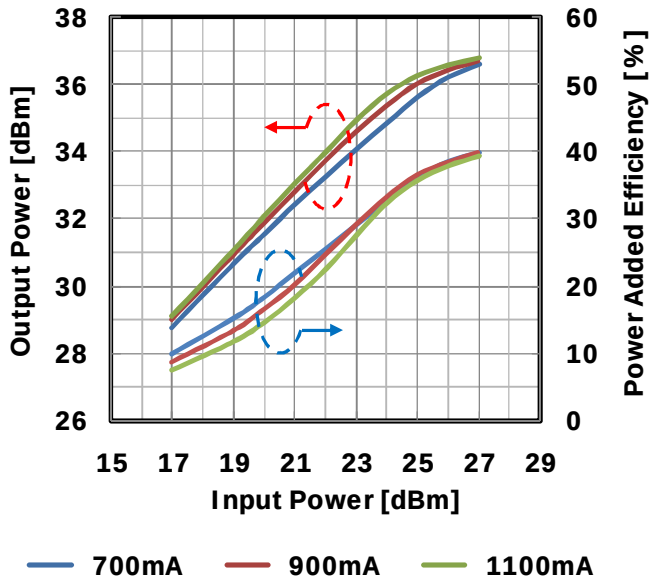


Input Power vs. Output Power, Power Added Efficiency by Quiescent Drain Current

$V_{DS}=10V$ @6.8GHz

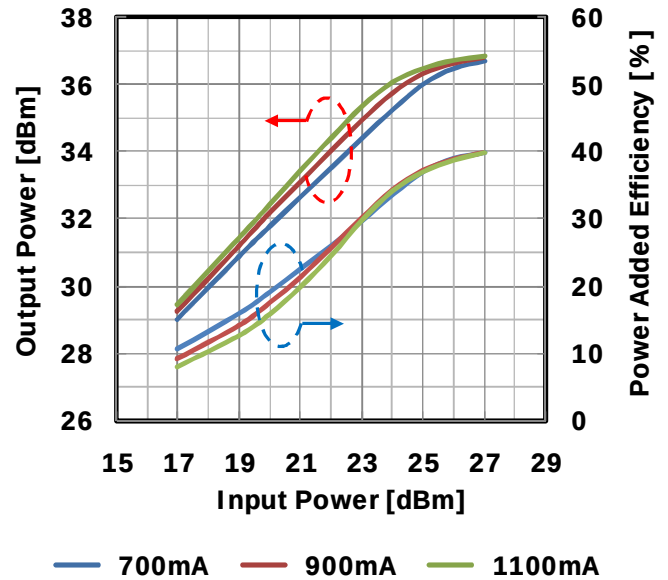

Input Power vs. Output Power, Power Added Efficiency by Quiescent Drain Current

$V_{DS}=10V$ @7.2GHz

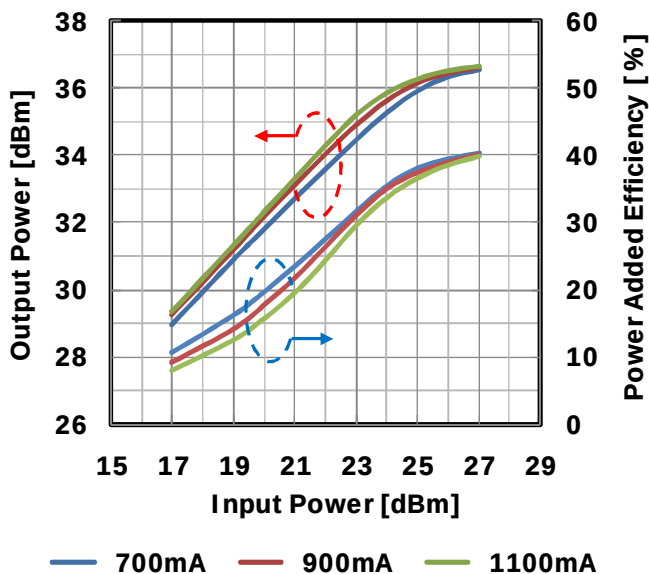


Eudyna


ELM6472-4PS

C-Band Internally Matched FET


Input Power vs. Output Power, Power Added Efficiency by Temperature
 $V_{DS}=10V$ @6.4GHz

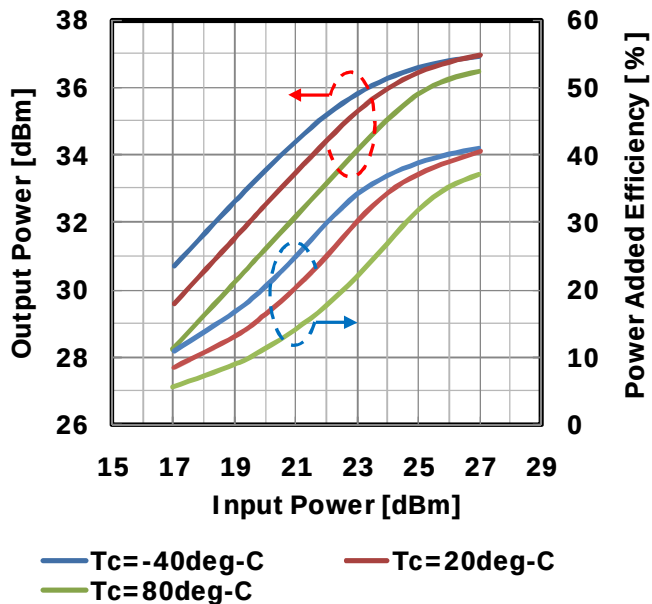

Input Power vs. Output Power, Power Added Efficiency by Temperature
 $V_{DS}=10V$ @6.8GHz

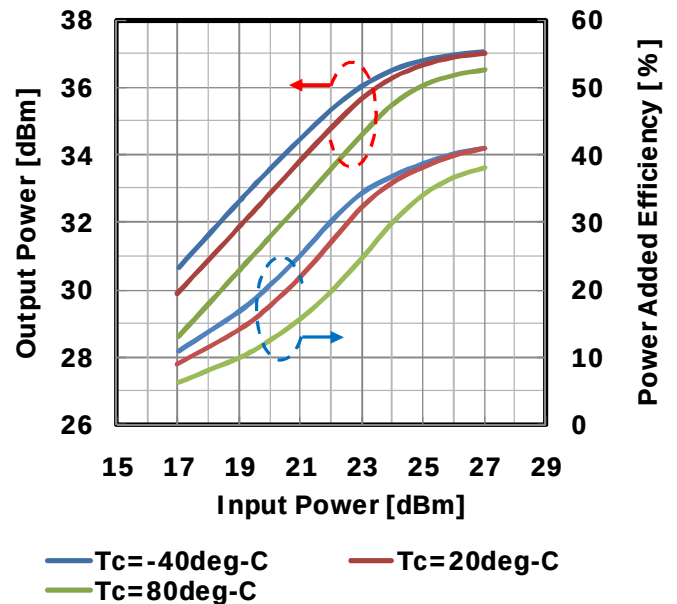

Input Power vs. Output Power, Power Added Efficiency by Temperature
 $V_{DS}=10V$ @7.2GHz

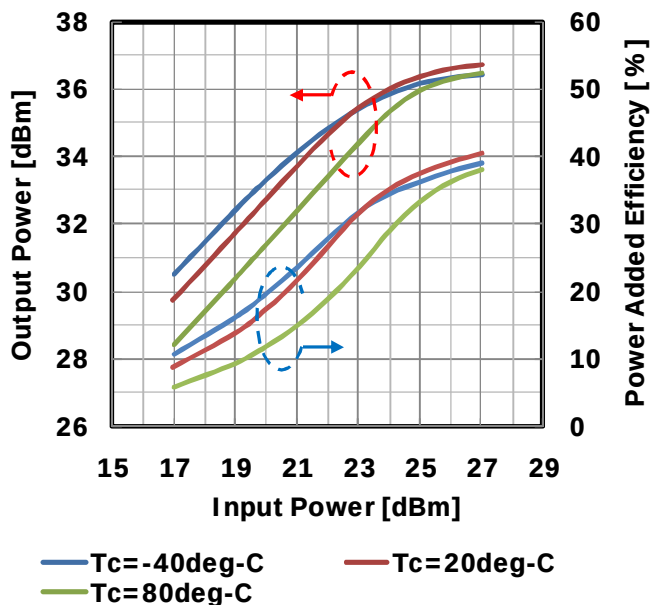


ELM6472-4PS

C-Band Internally Matched FET

IMD Performance vs. Output Power by Drain Voltage


$I_{DS(DC)} = 1100\text{mA}$ @6.4GHz

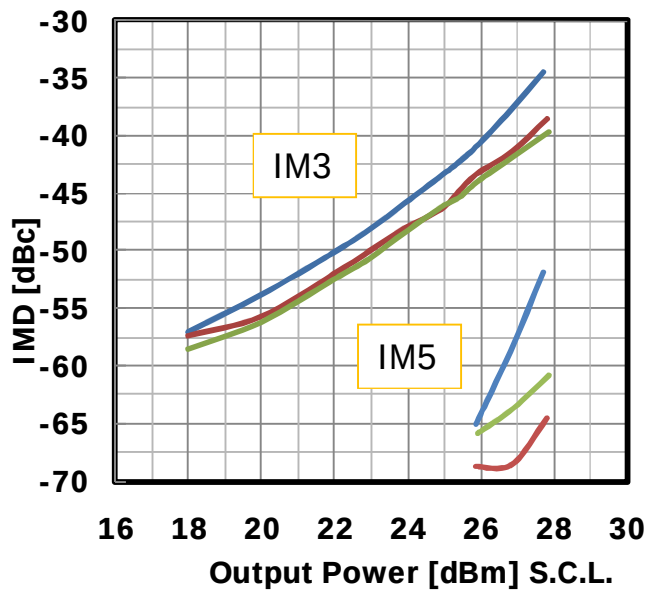

8V 9V 10V

IMD Performance vs. Output Power by Drain Voltage


$I_{DS(DC)} = 1100\text{mA}$ @6.8GHz

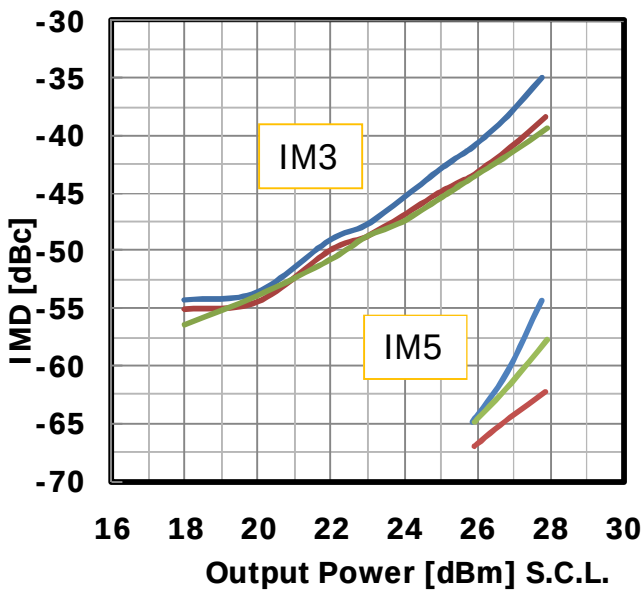

8V 9V 10V

IMD Performance vs. Output Power by Drain Voltage

$I_{DS(DC)} = 1100\text{mA}$ @7.2GHz

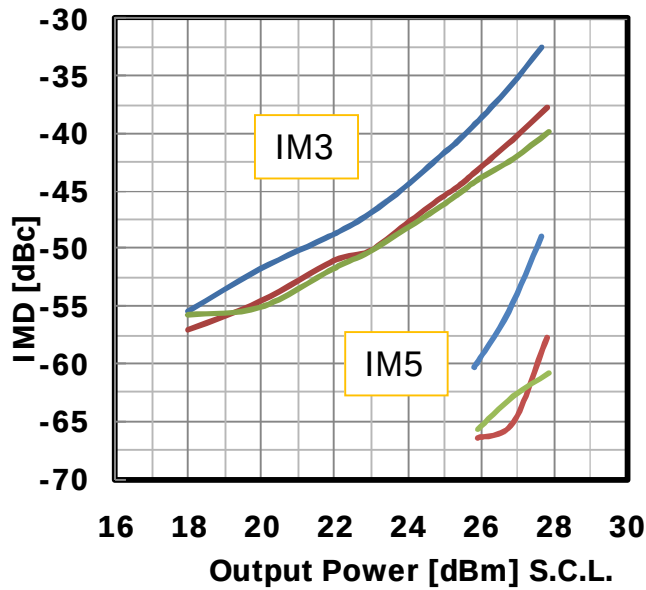


8V 9V 10V

Eudyna

ELM6472-4PS


C-Band Internally Matched FET

IMD Performance vs. Output Power by
Quiescent Drain Current
 $V_{DS}=10V$ @6.4GHz

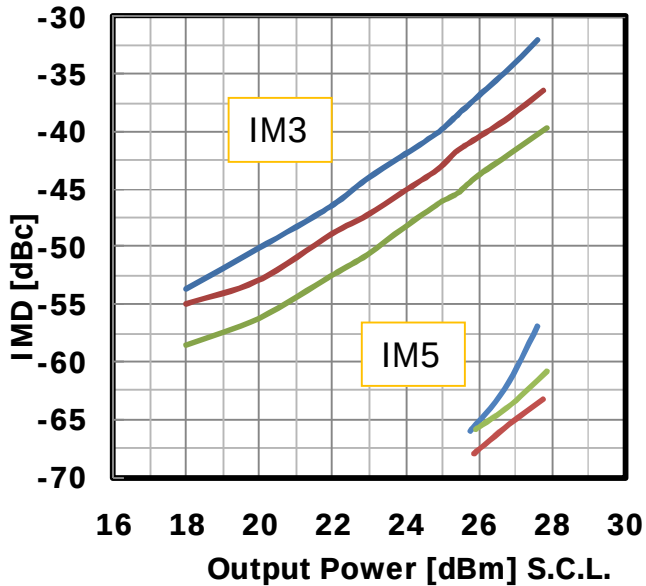


— 700mA — 900mA — 1100mA

IMD Performance vs. Output Power by
Quiescent Drain Current
 $V_{DS}=10V$ @6.8GHz

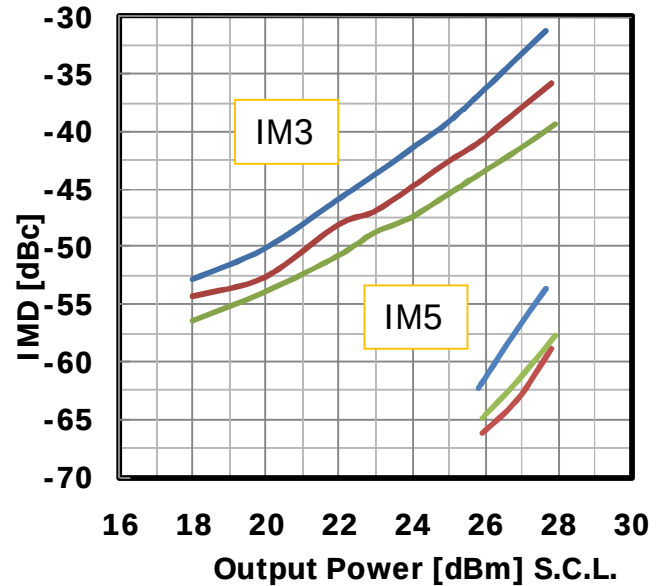

— 700mA — 900mA — 1100mA

IMD Performance vs. Output Power by
Quiescent Drain Current
 $V_{DS}=10V$ @7.2GHz

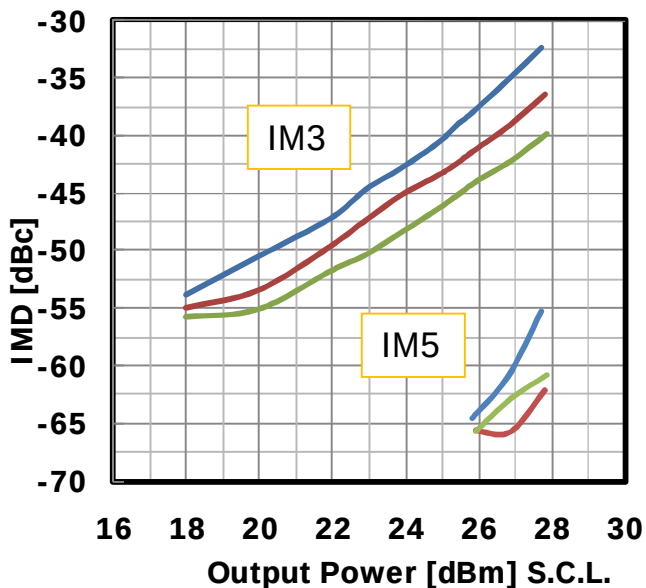


— 700mA — 900mA — 1100mA


ELM6472-4PS

C-Band Internally Matched FET


IMD Performance vs. Output Power by Temperature
 $V_{DS}=10V$ @6.4GHz

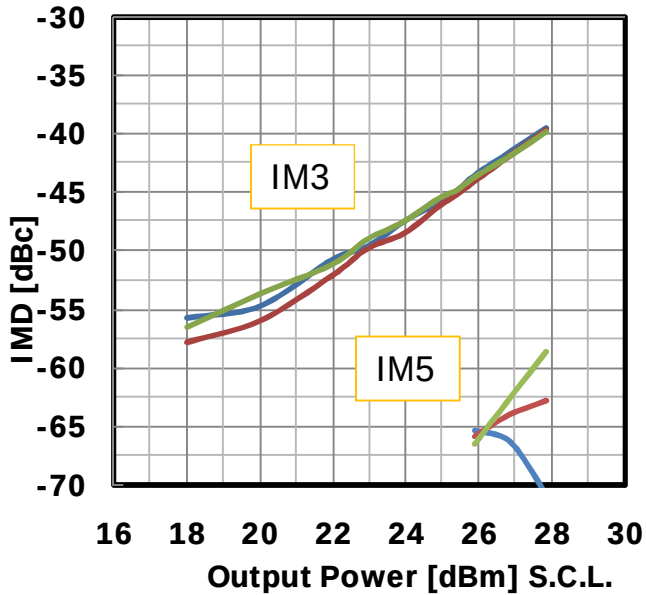

IMD Performance vs. Output Power by Temperature
 $V_{DS}=10V$ @6.8GHz

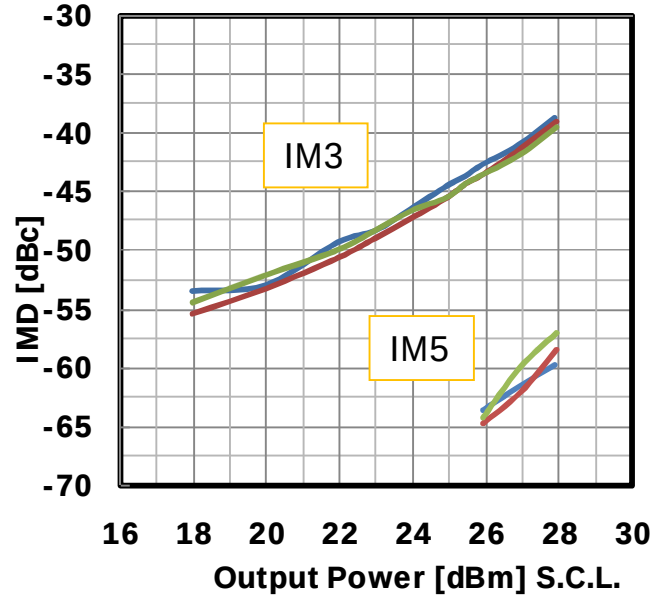

IMD Performance vs. Output Power by Temperature
 $V_{DS}=10V$ @7.2GHz


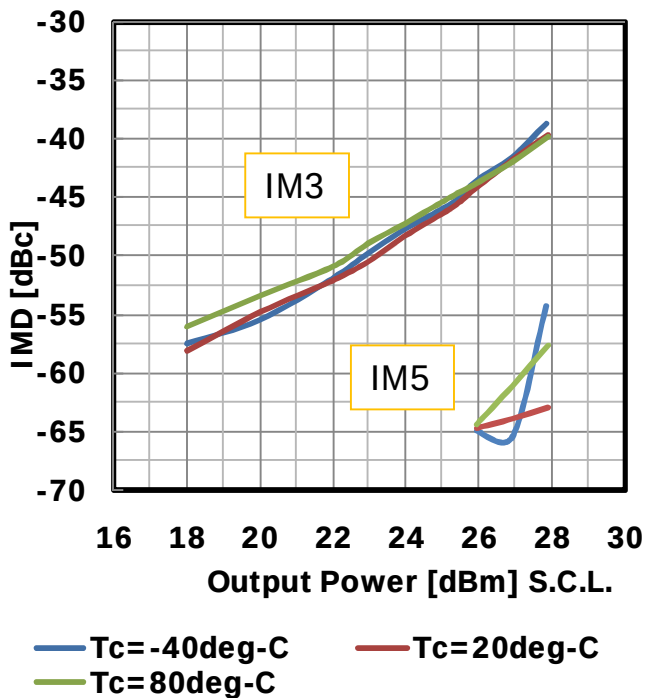


Eudyna


ELM6472-4PS

C-Band Internally Matched FET

● S-Parameter

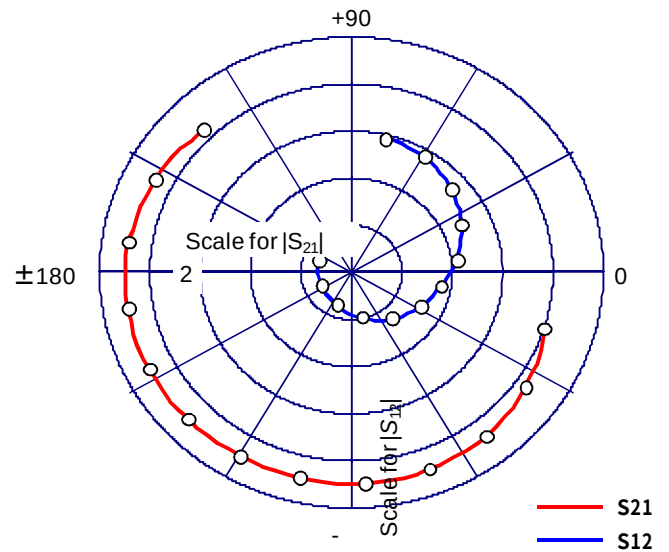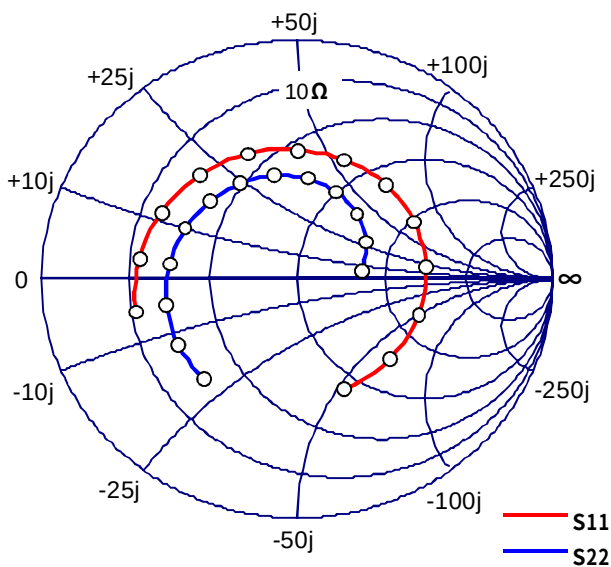

Frequency (MHz)	S11		S21		S12		S22	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
6200	0.696	-168.6	3.710	-14.2	0.054	79.8	0.553	-140.7
6300	0.683	175.8	3.777	-29.7	0.051	64.6	0.558	-157.2
6400	0.664	160.9	3.840	-44.6	0.047	49.5	0.562	-172.8
6500	0.644	146.2	3.877	-59.2	0.042	34.5	0.564	173.3
6600	0.620	131.4	3.924	-73.6	0.037	19.1	0.564	159.7
6700	0.587	116.5	3.981	-87.9	0.032	4.7	0.562	147.6
6800	0.554	101.4	4.083	-102.4	0.028	-12.7	0.556	136.5
6900	0.516	83.9	4.218	-117.2	0.024	-33.6	0.540	125.0
7000	0.468	63.1	4.412	-133.4	0.019	-59.3	0.513	113.6
7100	0.419	37.5	4.590	-151.0	0.015	-95.1	0.467	101.4
7200	0.381	4.8	4.735	-170.2	0.014	-140.1	0.399	88.4
7300	0.380	-33.9	4.727	168.6	0.015	173.6	0.303	74.4
7400	0.426	-71.1	4.535	146.8	0.019	133.6	0.183	60.9

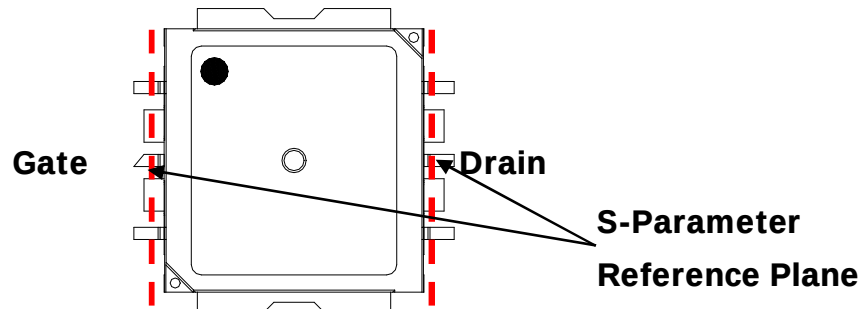


Eudyna

ELM6472-4PS

C-Band Internally Matched FET


● Package Outline

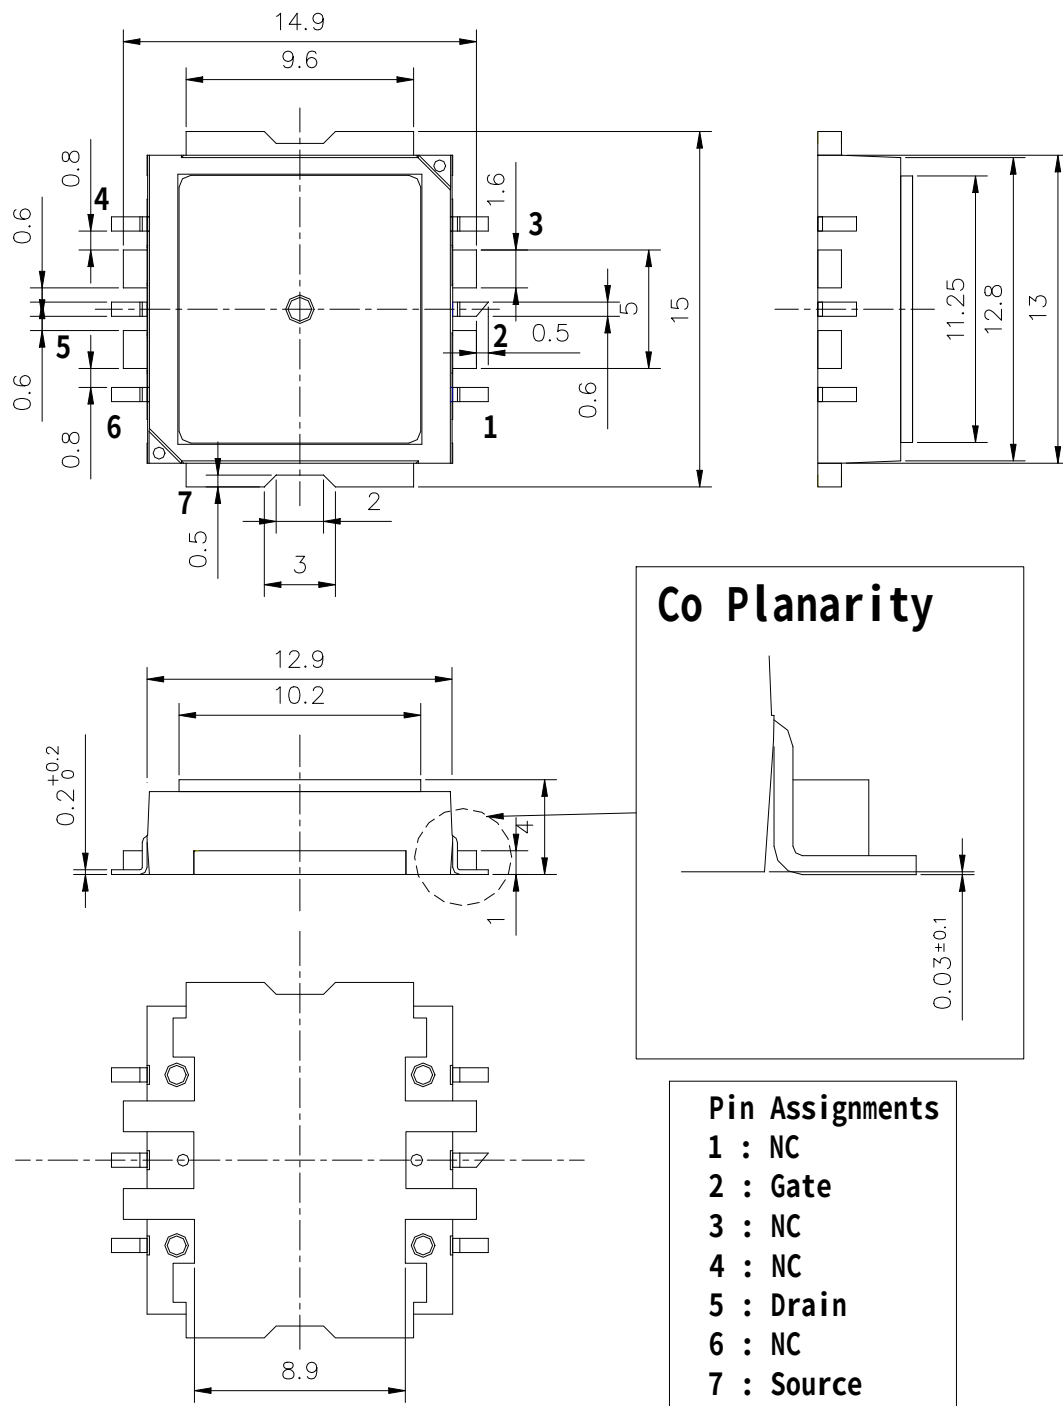


ELM6472-4PS

C-Band Internally Matched FET

● PCB Pads and Solder-Resist Pattern

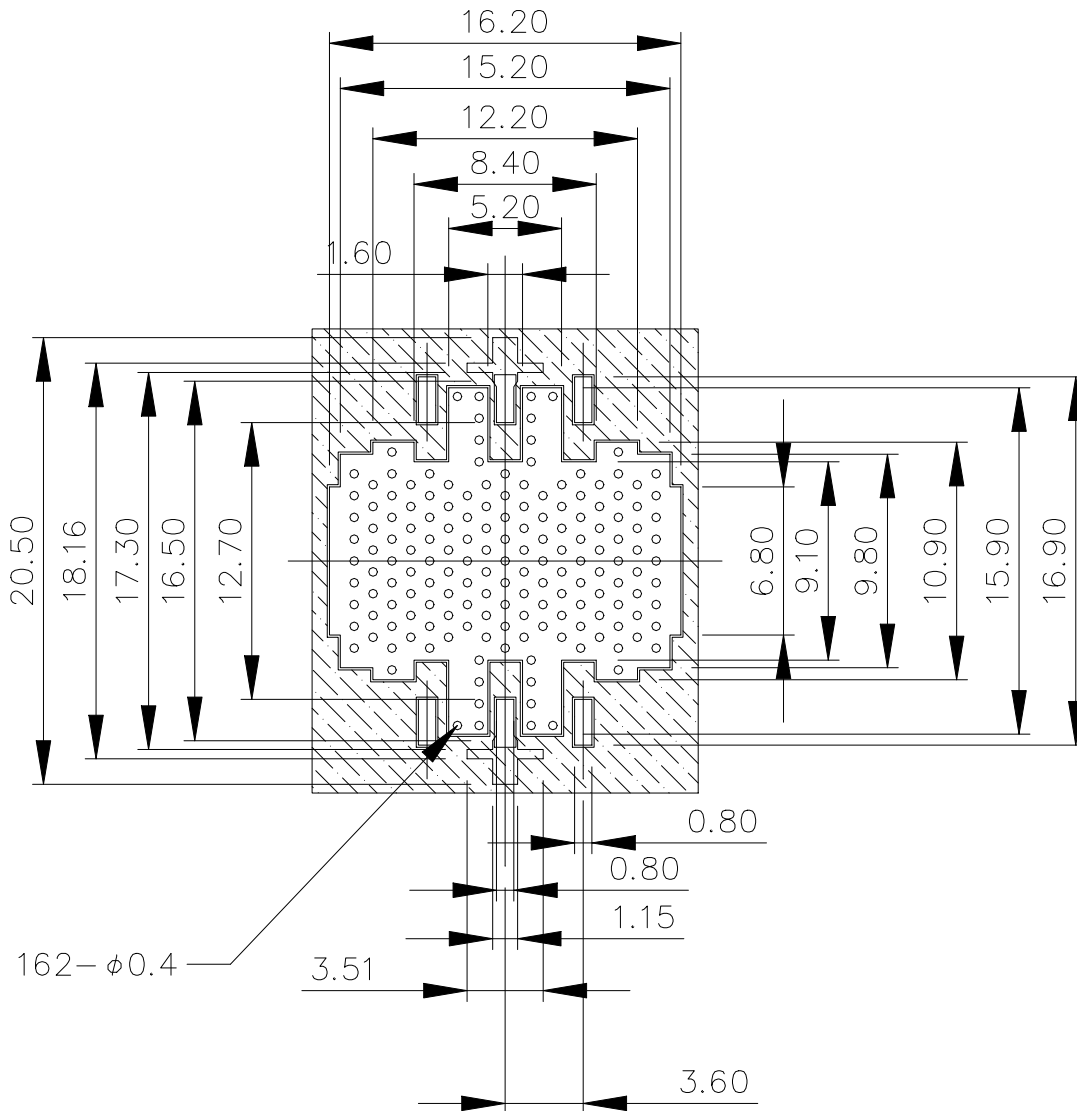



Notes :

1. Laminate : Rogers Corporation R04003, Thickness $t=0.508\text{mm}$, Cu Foil $18\mu\text{m}$.
Finish to copper foil : Ni $0.1\mu\text{m}$ min. / Au $0.1\mu\text{m}$ (Both side).
2.  : Resist

ELM6472-4PS

C-Band Internally Matched FET

● Marking and Tape/Reel Configuration

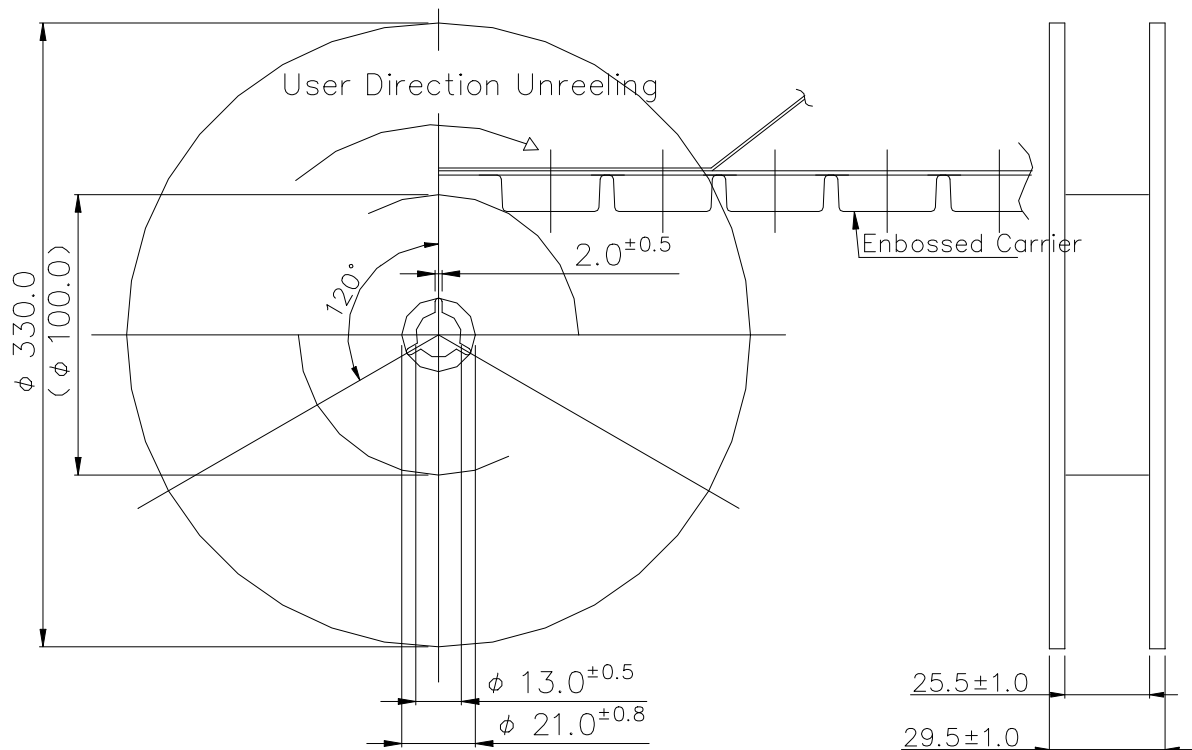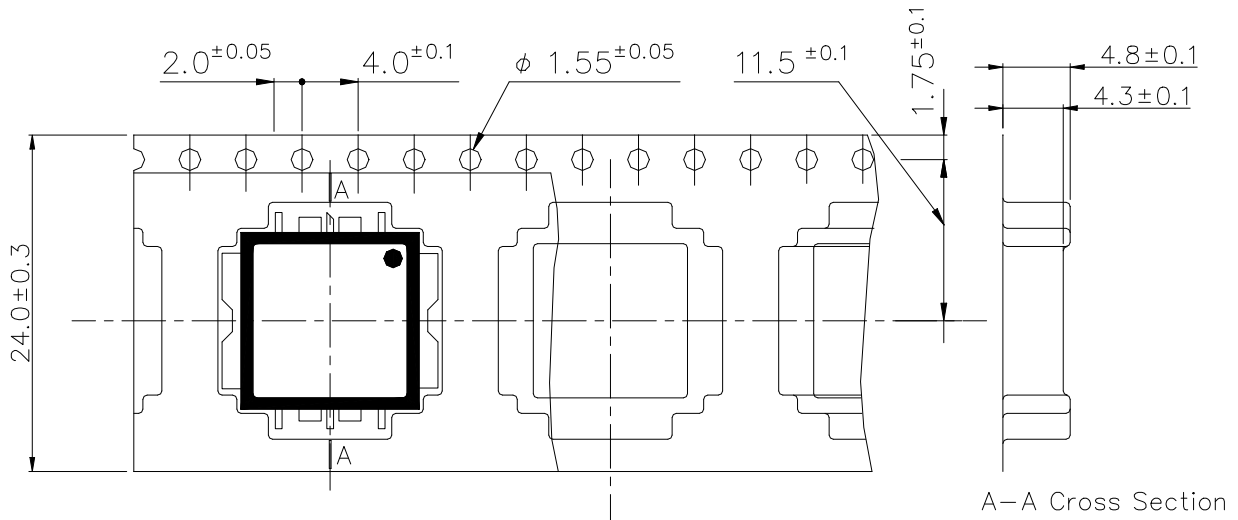

Quantity: 500pcs/tape
Tape Material: Conductive PS

(unit in mm)

Eudyna

ELM6472-4PS

C-Band Internally Matched FET

● Mounting Instructions for Package for Lead-free solder

Mounting Condition

For soldering, Lead-free solder (Sn-3.0Ag-0.5Cu)*1 or equivalent shall be used.

1. The example solder is a tin-rich alloy with 3.0% silver and 0.5% copper, often called Sn 96 for its approximate Tin content.
2. A rosin type flux with chlorine content of 0.2% or less shall be used. The rosin flux with low halogen content is recommended. When soldering, use the following time/ temperature profile with any of the methods listed for acceptable solder joints.
3. Make sure the devices have been properly prepared with flux prior soldering.


*Reflow soldering method (Infrared reflow / Heat circulation reflow / Hot plate reflow):

Limit solder to 3 reflow cycles because resin is used in the modules manufacturing process.

Excessive reflow will effect the resin resulting in a potential failure or latent defect.

The recommended reflow temperature profile is shown below. The temperature of the reflow profile must be measured at the device lead.

● Reflow temperature profile and condition:

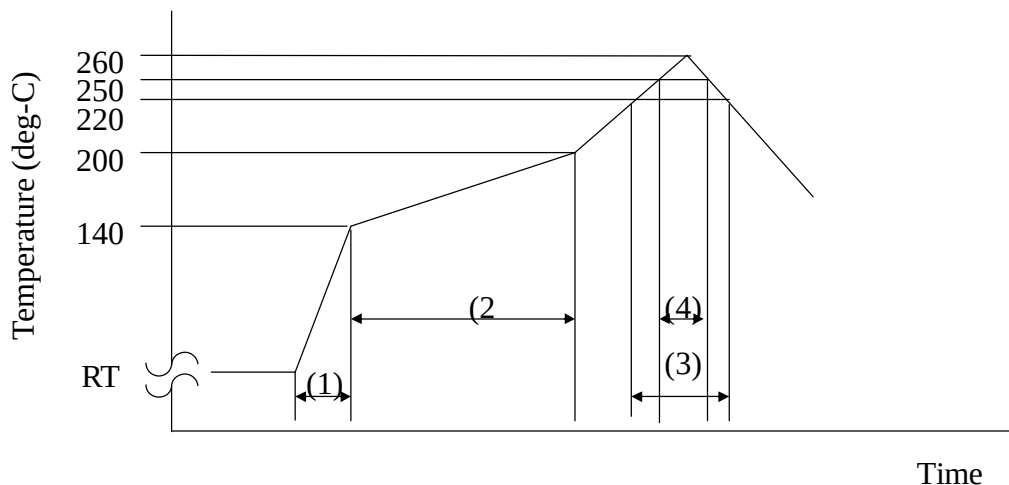

- (1). Temperature rise: 3 deg-C/seconds.
- (2). Preheating: 150 – 200 deg-C, 60 - 180seconds.
- (3). Main heating: 220 deg-C, 60 seconds max.
- (4). Main heating: 260 deg-C max., more than 250 deg-C, 20 - 40 seconds max.

* Measurement point: Device Heat-sink (Source Pin)

1. The above-recommended conditions were confirmed using the manufacturer's equipment and materials. However, when soldering these products, the soldering condition should be verified by customer using their own particular equipment and materials.

● Cleaning

Avoid washing of the device after soldering by reflow method due to the risk of liquid absorption by the resin used in this part.

Humidity Lifetime for ELMxxxx-4PST

The following graph shows the effect of moisture on lifetime (moisture resistance) for the **ELMxxxx-4PST**. Each graph indicates the MTTF and failure rate prediction (Confidential Level = 90 %) which calculated from the results of highly accelerated temperature and humidity stress test (HAST).



Representative of device type: ELM7179-4PST

Subject of device type : ELMxxxx-4PST

Field environmental conditions for operation

If the **ELMxxxx-4PST** is installed in a non-hermetic environment, please refer to the following recommendations and notes for design with, and assembly and use of our products.

- Note 1. When drain current cuts off, it should be cut off by drain bias, and not cut off by gate bias only. The humidity lifetime becomes shorter in case of the gate-only cut off operation due to electric field strength interacting with humidity.
- Note 2. **ELMxxxx-4PST** should be used under the environment conditions of no dew condensation. These plots do not apply in the case of liquid absorbed into the resin, whether applied to the part in assembly or as condensate in the application.

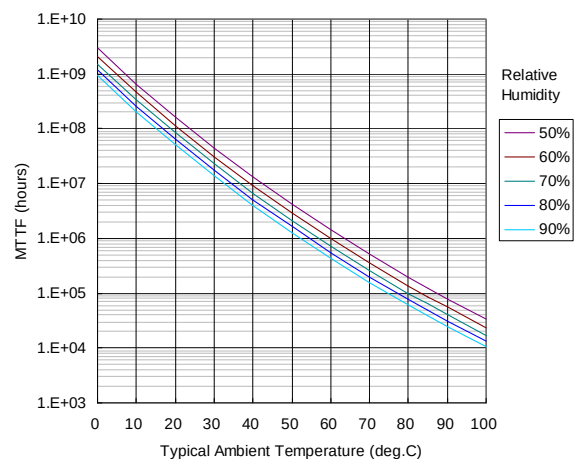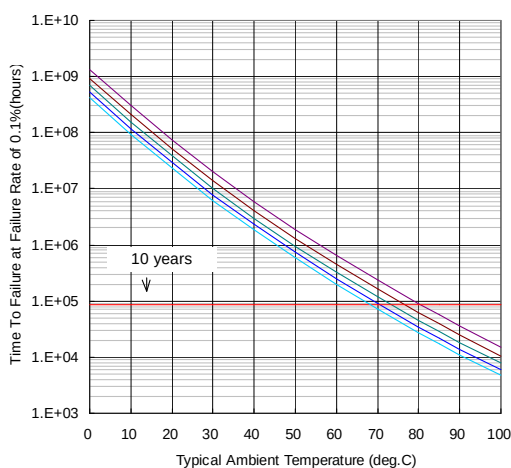

ELM6472-4PS

C-Band Internally Matched FET

For further information please contact:

Eudyna Devices USA Inc.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
TEL: +1 408 232-9500
FAX: +1 408 428-9111

Eudyna Devices Europe Ltd.

150 Edinburgh Avenue
Slough, Berkshire, SL1 4SS
United Kingdom
TEL: +44 (0) 1753 849950
FAX: +44 (0) 11753 577128

Eudyna Devices International Srl

Via Teglio 8/2 - 20158
Milano, Italy
TEL: +39-02-3705 2921
FAX: +39-02-3705 2920

Eudyna Devices Asia Pte. Ltd.

Hong Kong Branch
Suite 1906B, Tower 6, China Hong
Kong City
33 Canton Road, Tsim sha tsui,
Kowloon
Hong Kong
TEL: +852-2377-0227
FAX: +852-2377-3921

Eudyna Devices Inc.

1000 Kamisukiahara, showa-cho
Nakakomagun, Yamanashi
409-3883, Japan
(Kokubo Industrial Park)
TEL +81-55-275-4411
FAX +81-55-275-9461

Sales Division

1, Kanai-cho, Sakae-ku
Yokohama, 244-0845, Japan
TEL +81-45-853-8156
FAX +81-45-853-8170

CAUTION

- Eudyna Devices Inc. products contain gallium arsenide (GaAs) which can be hazardous to the human body and the environment. For safety, observe the following procedures:
- Do not put these products into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and Specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2007 Eudyna Devices Inc.

The logo for Eudyna, featuring the word "Eudyna" in a stylized, italicized red font.