





Y
(Lochbild)
(board drillings)

alle Löcher
all holes

$\phi 1 \pm 0,1$


Position
position

Reihe
row

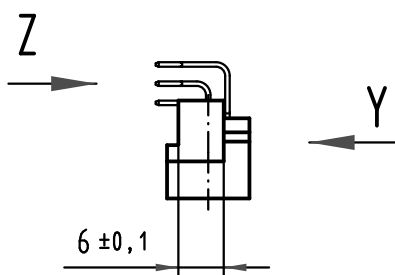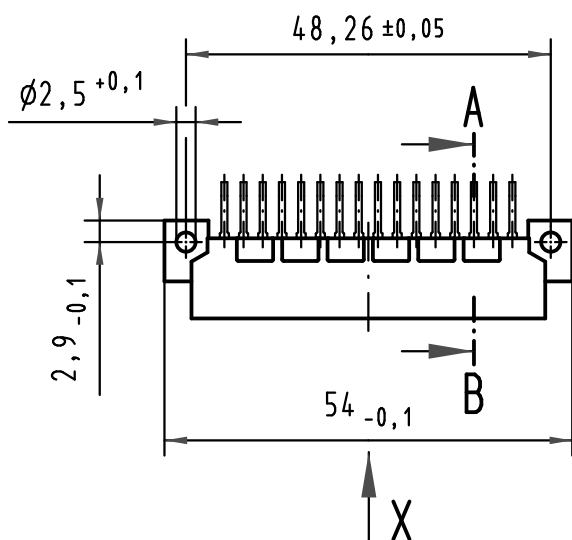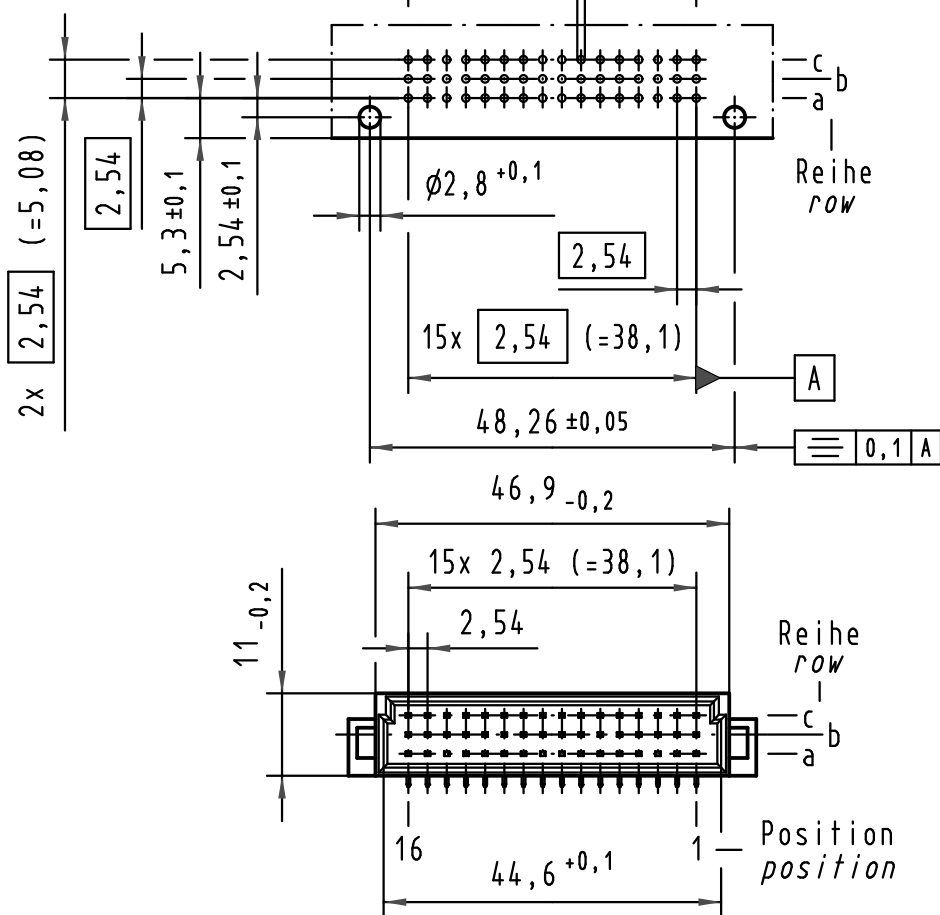


Montageloch-Mittellinie
mounting hole center-line

Referenzebene Tiefe
datum plane depth

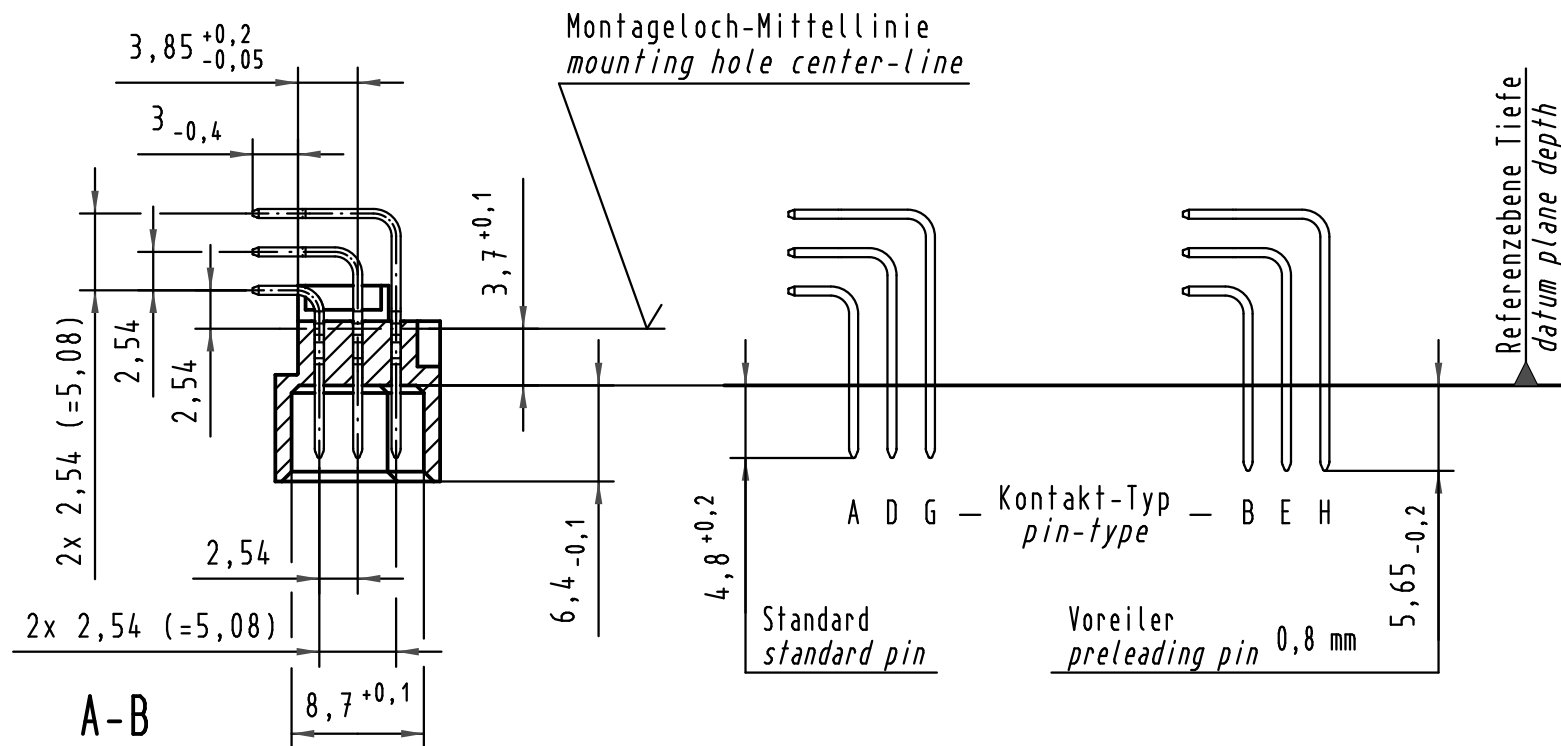

A-B
2:1



X Kontaktbelegung
contact loading

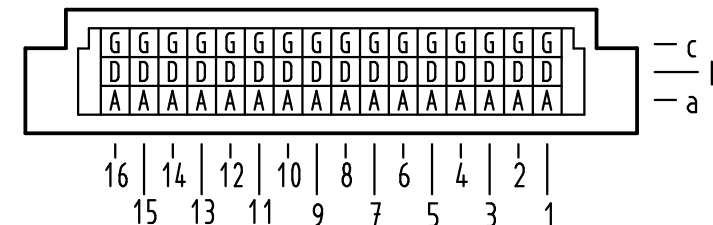

09 23 148 7921	3	Au flash over PdNi over Ni
09 23 148 6921	2	Au flash over PdNi over Ni
09 23 148 2921	1	Au flash over PdNi over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche contact plating

Z
10:1

Querschnitt der
Lötanschlüsse:
cross-section of
solder terminations:

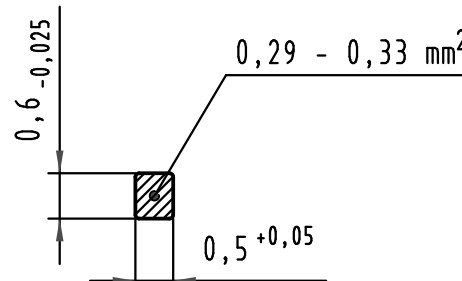

All Dimensions in mm
Original Size DIN A 3

Techn. Character.

	Dat.	Name	Maßstab/Scale
Detail.	14.07.00	Rie.	1:1
Insp.	14.07.00	Pa.	2:1
Stand.			10:1

Nicht tolerierte Maße/Free size tolerances
IEC 60603-2

Bauform 2C Messerleiste
Einlöt , 48 pol.
type 2C male connector
solder , 48 pol.

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP



TB 09 23 148 x921

Blatt/ page