

## Barrier Blocks Series 176

.375 Density, 5-40 x 3/16"  
BH Screw, Dip Solder,  
Single Row


# Cinch

### Electrical Characteristics



**Voltage Rating:** 250 Volts maximum  
**Current Rating:** 15 Amps maximum  
**Maximum Watts Per Terminal:** 3750

### Mechanical Characteristics

**Maximum Wire Size:** 16 AWG  
**Recommended Tightening Torque:** 16 lb.-in.

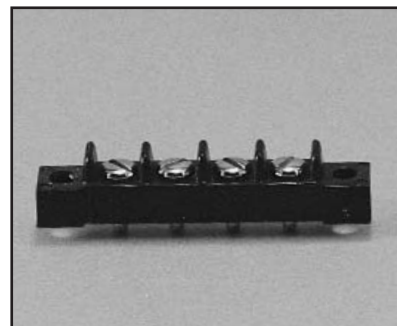

### Dimensions

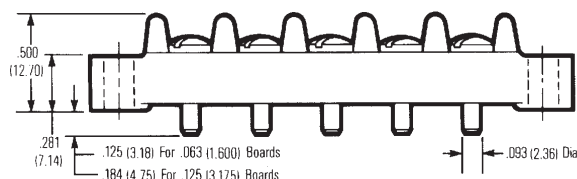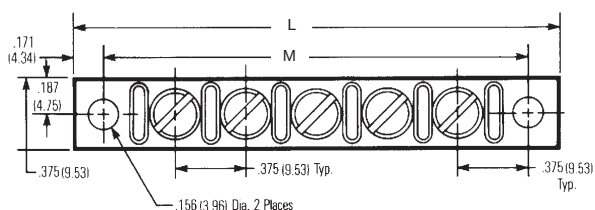

### Ordering Information

| No. of<br>Terminals | With Mounting Ears            |                               | "M"<br>Dimension | "L"<br>Dimension |
|---------------------|-------------------------------|-------------------------------|------------------|------------------|
|                     | Catalog No.<br>.125 Tail Lgth | Catalog No.<br>.184 Tail Lgth |                  |                  |
| 2                   | 2-176-2                       | 2-176-3                       | 1.125            | 1.469            |
| 3                   | 3-176-2                       | 3-176-3                       | 1.500            | 1.844            |
| 4                   | 4-176-2                       | 4-176-3                       | 1.875            | 2.219            |
| 5                   | 5-176-2                       | 5-176-3                       | 2.250            | 2.594            |
| 6                   | 6-176-2                       | 6-176-3                       | 2.625            | 2.969            |
| 7                   | 7-176-2                       | 7-176-3                       | 3.000            | 3.344            |
| 8                   | 8-176-2                       | 8-176-3                       | 3.375            | 3.719            |
| 9                   | 9-176-2                       | 9-176-3                       | 3.750            | 4.094            |
| 10                  | 10-176-2                      | 10-176-3                      | 4.125            | 4.469            |

| No. of<br>Terminals | Without Mounting Ears         |                               | "L"<br>Dimension |
|---------------------|-------------------------------|-------------------------------|------------------|
|                     | Catalog No.<br>.125 Tail Lgth | Catalog No.<br>.184 Tail Lgth |                  |
| 2                   | 2-176-2A                      | 2-176-3A                      | .719             |
| 3                   | 3-176-2A                      | 3-176-3A                      | 1.094            |
| 4                   | 4-176-2A                      | 4-176-3A                      | 1.469            |
| 5                   | 5-176-2A                      | 5-176-3A                      | 1.844            |
| 6                   | 6-176-2A                      | 6-176-3A                      | 2.219            |
| 7                   | 7-176-2A                      | 7-176-3A                      | 2.594            |
| 8                   | 8-176-2A                      | 8-176-3A                      | 2.969            |
| 9                   | 9-176-2A                      | 9-176-3A                      | 3.344            |
| 10                  | 10-176-2A                     | 10-176-3A                     | 3.719            |
| 11                  | 11-176-2A                     | 11-176-3A                     | 4.094            |
| 12                  | 12-176-2A                     | 12-176-3A                     | 4.469            |

Marketed exclusively through distribution.