




Connectors > Pluggable IO Connectors & Cages > SFP, SFP+ & zSFP+ > zSFP+ Stacked Cage Assembly: EMI Spring

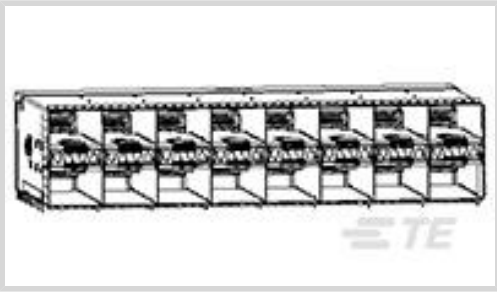

Pluggable I/O Product Type: **Cage Assembly with Integrated Connector**

Data Rate (Max): **32 Gb/s**

EMI Containment Feature Type: **External Springs**

Pluggable I/O Applications: **zSFP+ Thermally Enhanced**

Lightpipe Options: **With Lightpipe**

[All zSFP+ Stacked Cage Assembly: EMI Spring \(45\)](#)

Features

Product Type Features

Form Factor	zSFP+ Stacked (SFP28)
Cage Type	Stacked
Pluggable I/O Product Type	Cage Assembly with Integrated Connector
Lightpipe Options	With Lightpipe
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Port Matrix Configuration	2 x 8
Lightpipe Configuration	Quad Triangular (Inner & Outer)
Lightpipe Style	Standard
Number of Ports	16
Number of Positions	320

Electrical Characteristics

Data Rate (Max)	32 Gb/s
-----------------	---------

Contact Features

Tail Plating Material	Tin
-----------------------	-----



Contact Mating Area Plating Material Thickness	.76 µm[29.92 µin]
Contact Mating Area Plating Material	Gold or Gold Flash over Palladium Nickel

Termination Features

Termination Post & Tail Length	1.8 mm[.07 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit

Housing Features

Cage Material	Nickel Silver Alloy
Centerline (Pitch)	.8 mm[.032 in]

Dimensions

PCB Thickness (Recommended)	1.5 mm[.059 in]
-----------------------------	-----------------

Usage Conditions

Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Heat Sink Compatible	No
For Use With Pluggable I/O Products	zSFP+ SMT Connector
Pluggable I/O Applications	zSFP+ Thermally Enhanced
Circuit Application	Signal

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tray
------------------	------

Other

EMI Containment Feature Type	External Springs
------------------------------	------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224)



Does not contain REACH SVHC

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # CAT-C11-N490333 QSFP28-Four SFP+ Cable Assembly: 30 AWG	 TE Part # CAT-C11-N490325 QSFP28-Four SFP+ Cable Assembly: 26 AWG	 TE Part # 2334985-2 SFP28 DIRECT ATTACH CA, 1M, 32AWG	 TE Part # CAT-C11-N4901114 SFP28 to SFP28 Cable Assembly: 30 AWG
 TE Part # CAT-C11-N49011 SFP28 to SFP28 Cable Assembly: 26 AWG	 TE Part # CAT-Q17-N49011 QSFP56-Four SFP56 Cable Assembly: 30 AWG	 TE Part # CAT-Q17-N490333 QSFP56-Four SFP56 Cable Assembly: 26 AWG	 TE Part # 4-2821222-5 SFP56 DIRECT ATTACH CA, 2M, 30AWG
 TE Part # 4-2821224-5 SFP56 DIRECT ATTACH CA, 3M, 26AWG	 TE Part # 4-2334985-2 SFP56 DIRECT ATTACH CA, 1M, 32AWG	 TE Part # CAT-C11-N490111 SFP28 to SFP28 Cable Assembly: 28 AWG	

Customers Also Bought



TE Part #1-770858-1
10P MINI UMNL HDR ASSY AU LF



TE Part #223956-1
STV ERMZUB FUEHRUNGSBOLZEN J
* M 1 ***




TE Part #2007198-2
SFP+ 1x1 Cage Assembly, Press-Fit




TE Part #5223955-2
TE UPM Ver Receptacle 3P STD Power



TE Part #62274-1
250 FASTON REC 22-18 AWG TPBR

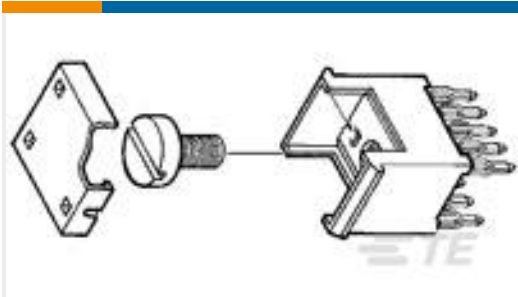

TE Part #5055557-4
10 POWER TAP ASSY .100

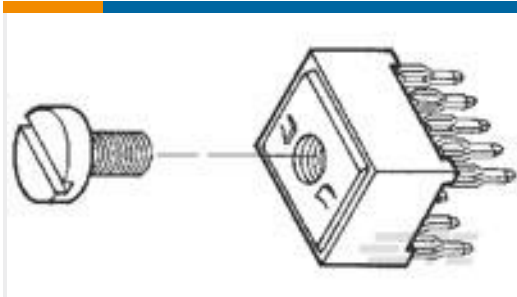

TE Part #9-55556-0
10 POWER TAP ASSY WITH SCREW
#6-32



TE Part #2299924-5
ZQSFP+ STACKED REC ASSEMBLY
2X3,4LP HS



TE Part #91514-1
CCII FASTON 250 REC 22-18 ASSY

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2198346-6_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2198346-6_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2198346-6_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

zSFP+ Interconnect Brochure

English

Product Specifications



Application Specification

English