




Part Number : [757595001](#)
Product Description : Small Form-factor Pluggable (SFP) Stacked 2-by-2 Multi-Port Connector with Press-fit PC Tails, 80 Circuits, Lead-Free
Series Number : 75759
Status : Obsolete
Product Category : High-Speed Pluggable Connectors

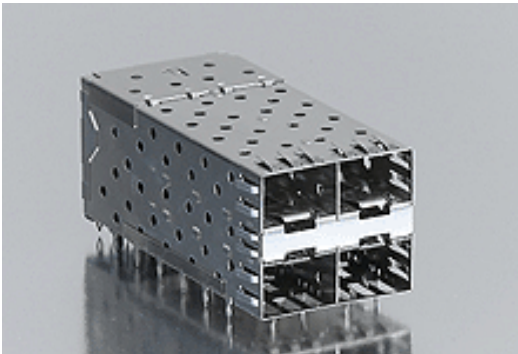

Documents & Resources

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2022)4187-DC (10 June 2022)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	Obsolete
Category	High-Speed Pluggable Connectors
Series	75759
Description	Small Form-factor Pluggable (SFP) Stacked 2-by-2 Multi-Port Connector with Press-fit PC Tails, 80 Circuits, Lead-Free
Application	Module-to-Board
Component Type	Receptacle
Product Family	SFP+ and SFP Interconnect Solutions
Product Name	SFP
Type	N/A
UPC	822350235440

Agency

CSA	LR19980
UL	E29179

Electrical

Current - Maximum per Contact	0.5A
Shielded	No
Voltage - Maximum	120V AC (RMS)/DC

Physical

Boot Color	N/A
Circuits (Loaded)	80
Circuits (maximum)	80
Color - Resin	Black
Durability (mating cycles max)	100
Flammability	94V-0
Gender	Female
Lock to Mating Part	Yes
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin

Material - Resin	High Temperature Thermoplastic
Net Weight	43.982/g
Number of Rows	2
Orientation	Right Angle
Packaging Type	Tray
Panel Mount	No
PC Tail Length	2.07mm
PCB Locator	Yes
PCB Retention	Yes
PCB Thickness - Recommended	2.36mm
Pitch - Mating Interface	0.80mm
Pitch - Termination Interface	0.80mm
Plating min - Mating	0.762μm
Plating min - Termination	0.762μm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Ports	4
Temperature Range - Operating	-40° to +85°C
Termination Interface Style	Through Hole - Compliant Pin
Waterproof / Dustproof	No

Solder Process Data

Lead-Free Process Capability	N/A
------------------------------	-----

This document was generated on Sep 11, 2023