




专利申请中 PATENT PENDING

微型保险丝管(特快熔断型)


MICROFUSE (VERY FAST-ACTING)

20N 平均 I-T 曲线图 (仅供参考)
20N AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE)

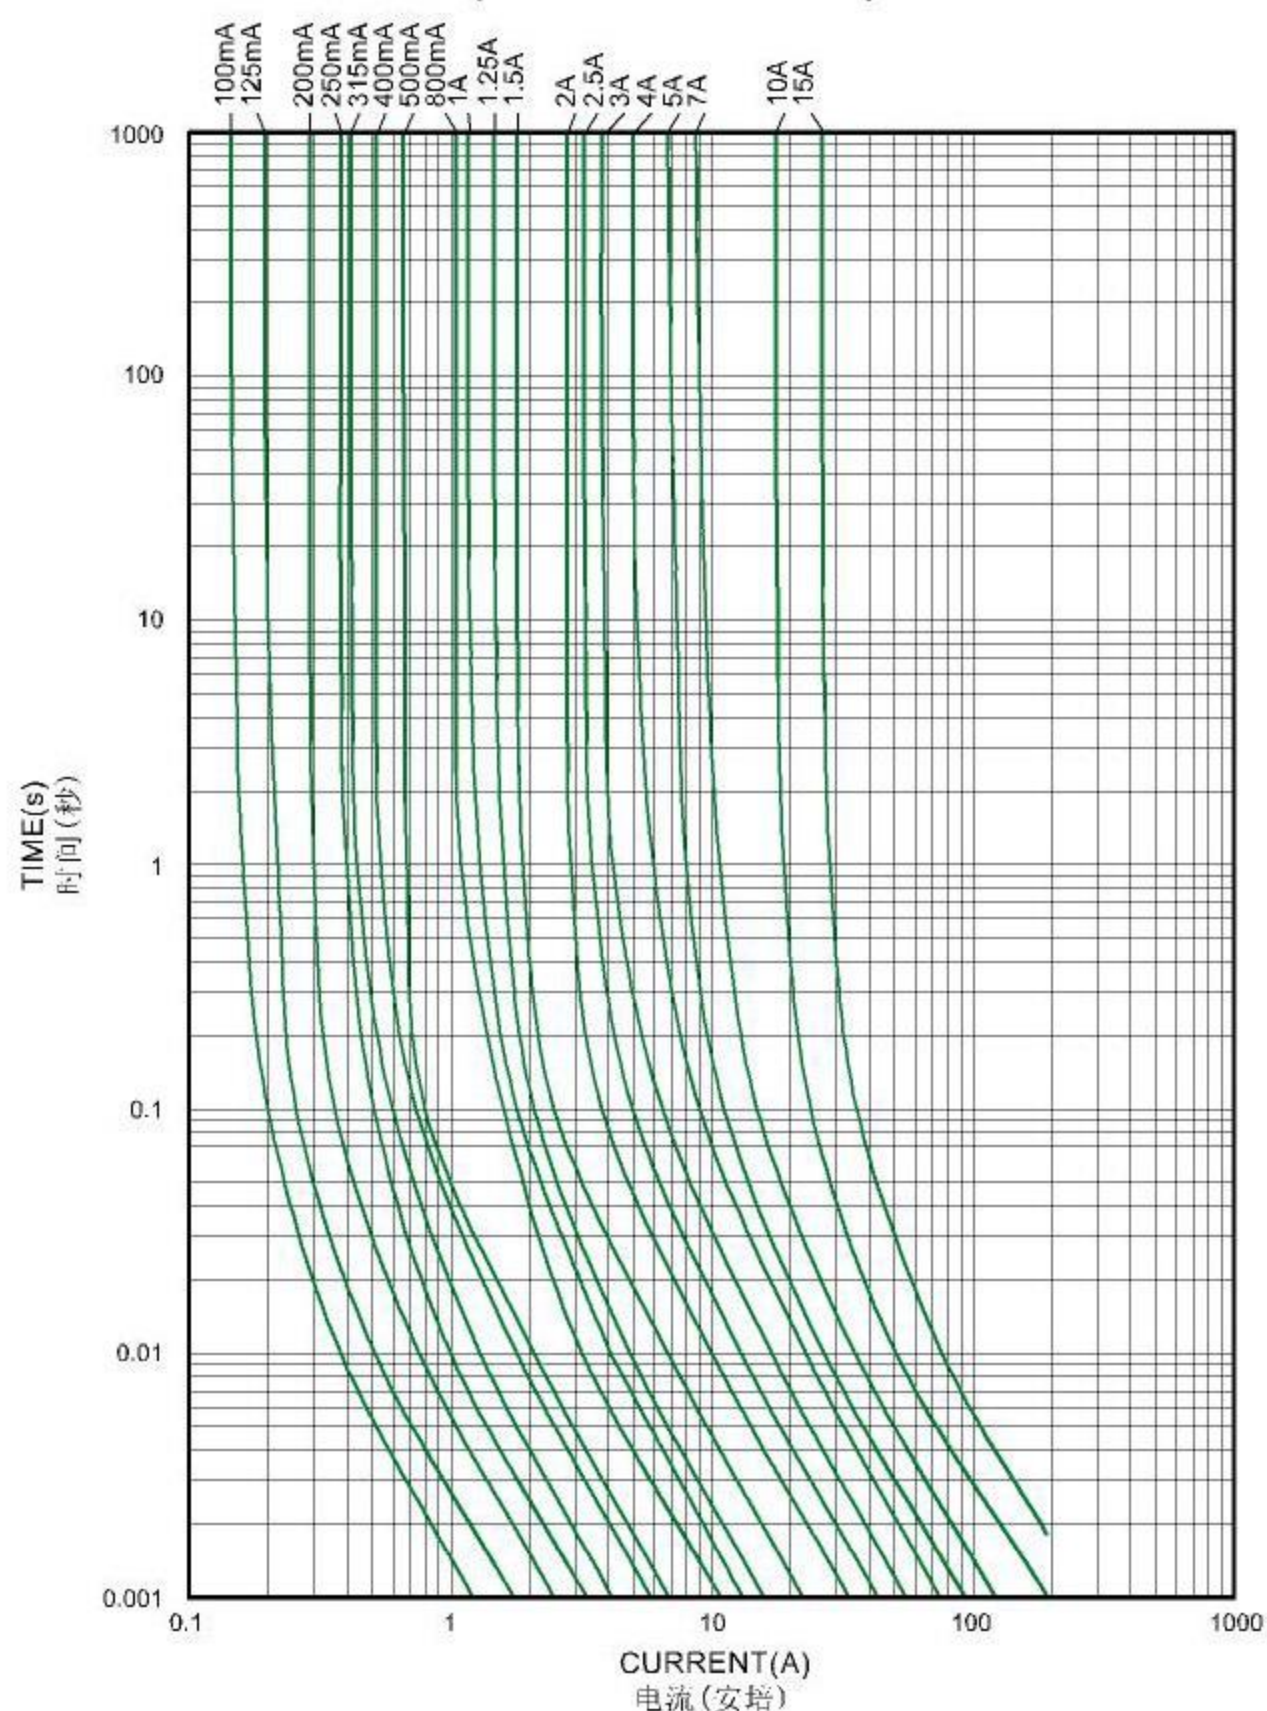


电气特性 ELECTRICAL CHARACTERISTICS:

额定电流的% % of CURRENT RATING	熔断时间 BLOWING TIME
100%	最快4小时 4 hours Min.
200%	最慢20秒 20 seconds Max.

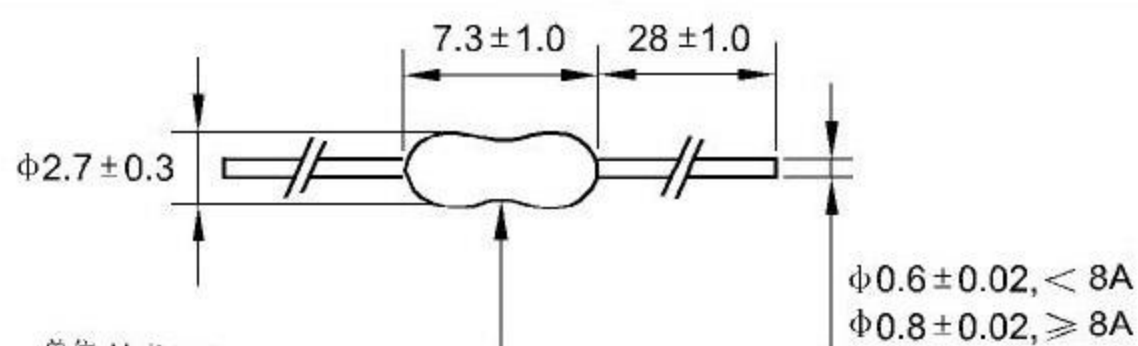

单位 Unit:mm

环氧涂层
EPOXY COATED

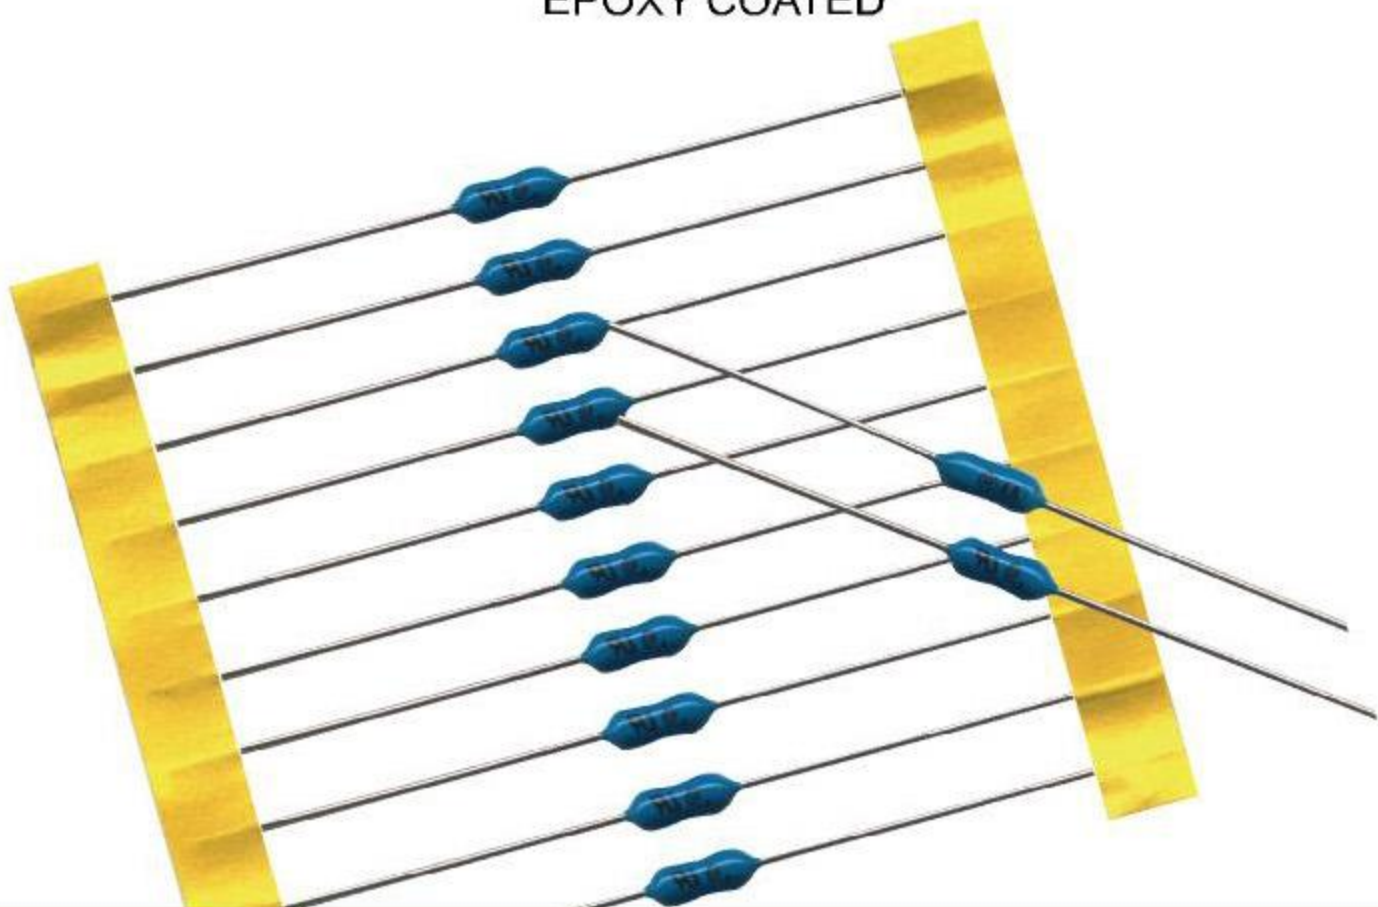

目录编号 CATALOG NO.	额定电流 CURRENT RATING	安全认证 SAFETY APPROVALS								I ² T 参考值 REFERENCE (A ² ·Sec.) (RoHS)	
		CCC	UL(CUL)		UR(CUR)		CSA		PSE		
		L	H	L	H	L	H	L	L		
20N-0100H/L	100mA			●	●			●	●		0.00144
20N-0125H/L	125mA			●	●			●	●		0.00263
20N-0160H/L	160mA			●	●			●	●		0.00420
20N-0200H/L	200mA			●	●			●	●		0.00578
20N-0250H/L	250mA	●		●	●			●	●		0.0100
20N-0300H/L	300mA			●	●			●	●		0.0163
20N-0315H/L	315mA	●		●	●			●	●		0.0169
20N-0375H/L	375mA		●	●				●	●		0.0256
20N-0400H/L	400mA	●	●	●				●	●		0.0324
20N-0500H/L	500mA	●	●	●				●	●		0.0440
20N-0600H/L	600mA		●	●				●	●		0.0565
20N-0630H/L	630mA	●	●	●				●	●		0.0580
20N-0700H/L	700mA		●	●				●	●		0.0803
20N-0750H/L	750mA		●	●				●	●		0.0840
20N-0800H/L	800mA	●	●	●				●	●		0.102
20N-010H/L	1A	●	●	●				●	●	●	0.168
20N-012H/L	1.2A		●	●				●	●	●	0.233
20N-013H/L	1.25A	●	●	●				●	●	●	0.240
20N-015H/L	1.5A		●	●				●	●	●	0.462
20N-016H/L	1.6A	●	●	●				●	●	●	0.563
20N-020H/L	2A	●	●	●				●	●	●	1.005
20N-023H/L	2.25A		●	●				●	●	●	1.532
20N-025H/L	2.5A	●	●	●				●	●	●	1.690
20N-030H/L	3A		●	●				●	●	●	2.890
20N-032H/L	3.15A	●			●	●		●	●	●	3.423
20N-035H/L	3.5A				●	●		●	●	●	4.410
20N-040H/L	4A	●			●	●		●	●	●	5.290
20N-050H/L	5A	●			●	●		●	●	●	7.290
20N-060H/L	6A				●	●		●	●		11.47
20N-063H/L	6.3A				●	●		●	●		11.80
20N-070H/L	7A				●	●		●	●		12.59
20N-080H/L	8A				●	●		●	●		14.39
20N-090H/L	9A				●	●		●	●		24.04
20N-100H/L	10A				●	●		●	●		26.01
20N-120H/L	12A					●			●		30.49
20N-150H/L	15A					●			●		58.52
20N-200H/L	20A					●					

H DENOTES FOR 250V (H 表示 250V)

L DENOTES FOR 125V (L 表示 125V, 100mA-10A)

L DENOTES FOR 72V (L 表示 72V, 12A-15A)

L DENOTES FOR 60V (L 表示 60V, 20A)

● DENOTES FOR APPROVED (● 表示已取得认证)

分断能力:

INTERRUPTING CAPACITY:

50 amperes at 125V AC (100mA-3A)

50 amperes at 250V AC (375mA-3A)

30 amperes at 125V AC (3.15A-10A)

30 amperes at 250V AC (100mA-350mA, 3.15A-10A)

30 amperes at 72V AC (12A-15A)


50 amperes at 60V DC (20A)

100 amperes at 125V AC (1A-5A) PSE

包装 PACKING:

1. 内盒 INNER BOX : AMMO PACK

内盒盖 The lid of inner box



单位 Unit:mm

4,000 pcs taped in one inner box
4,000 pcs / 内盒

2. 外箱 OUTER CARTON: 9 INNER BOXES/CARTON

尺寸 CARTON SIZE: L355xW295xH260(mm)