


BN 7

Hexagon socket head cap screws  
fully threaded  
fully threaded

DIN 912  
ISO 4762  
~UNI 5931

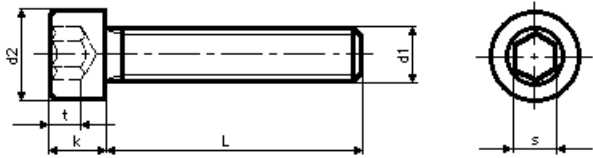

|          |       |                           |            |
|----------|-------|---------------------------|------------|
| Material | Steel | Tensile strength          | 1200 N/mm2 |
| Surface  | black | Proof stress 0,2%         | 1080 N/mm2 |
| Quality  | 12.9  | Elongation after fracture | min. 8%    |

|                       |     |
|-----------------------|-----|
| Article No. - 1006231 |     |
| d1                    | M2  |
| L                     | 3   |
| d2                    | 3,8 |
| k                     | 2   |
| s                     | 1,5 |
| t min                 | 1   |

DIN 912: Standard withdrawn

M 1.4; M18; M22; M27; M33 not included in ISO 4762.  
M 2.6 not included in DIN 912 and ISO 4762.