

tel: 516-746-2310 fax: 516-742-2416

email: caddell-burns@erols.com


258 East Second Street

Mineola, New York 11501-3508

HIGH CURRENT CHOKES


TYPE 7140

SEE NOTE 6

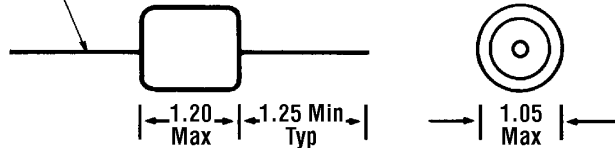

10 μ H-100 mH. 10% Tolerance
Recommended Mounting
Pitch—1.50"

TYPE 7150 (EPOXY ENCAPSULATED VERSION)

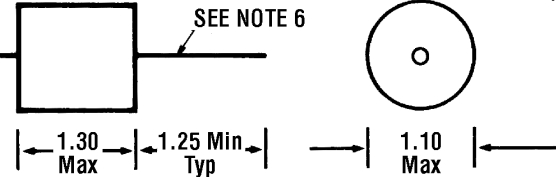

NOTES: (for both types)

1. INDUCTANCE measured on QuadTech/GenRad 1659 RLC Digibridge at 1.0 KHz.
2. CURRENT RATING (Rated IDC) is based on 1.5 watt power dissipation for approximately 20°C temperature rise. Depending on the application, these units may be operated at up to twice the rated current.
3. INCREMENTAL CURRENT (INCR I) is the minimum current at which the inductance will be decreased by 5% from its initial (zero-DC) value because of saturation.
4. DIELECTRIC WITHSTANDING VOLTAGE – 1000 VRMS
5. OPERATING TEMPERATURE RANGE: -55° to +105°C.
6. Leads are bare tinned copper: -01 thru -10, #14 AWG; -11, #15 AWG; -12 thru -49, #16 AWG.

7. Marking – Printed with Caddell-Burns Part Number.

8. Materials: (See below)

TYPE 7140

Coil Form: Ferrite

Magnet Wire: Per FED SPEC J-W-001177/9

Jacket: Per MIL-I-23053/5, Class 1.

Flame Retardant IAW UL 224, Class 1.

Type 7150

Coil Form: Ferrite


Magnet Wire: Per FED SPEC J-W-001177/9

Cover and Coating: Epoxy encapsulated

STANDARD VALUES: (Electrical characteristics are identical for both types. Other values are available on special order.)

Dash No.	Nominal Inductance	DCR $\pm 20\%$ Ohms	Min. SRF MHz	Rated IDC Amps	INCR I Amps	Dash No.	Nominal Inductance	DCR $\pm 20\%$ Ohms	Min. SRF MHz	Rated IDC Amps	INCR I Amps
-01	10 μ H	0.0060	8.8	16	43	-26	1.2 mH	0.23	0.48	2.6	3.8
-02	12	0.0065	8.0	15	39	-27	1.5	0.31	0.40	2.2	3.4
-03	15	0.0070	7.4	15	36	-28	1.8	0.35	0.37	2.1	3.1
-04	18	0.0080	5.4	14	32	-29	2.2	0.46	0.32	1.8	2.8
-05	22	0.0085	3.9	13	29	-30	2.7	0.54	0.30	1.7	2.6
-06	27	0.0090	3.3	13	26	-31	3.3	0.72	0.27	1.4	2.3
-07	33	0.010	3.1	12	24	-32	3.9	0.79	0.25	1.4	2.1
-08	39	0.011	2.7	12	21	-33	4.7	0.90	0.24	1.3	1.9
-09	47	0.012	2.6	11	20	-34	5.6	1.2	0.20	1.1	1.8
-10	56	0.013	2.3	11	18	-35	6.8	1.3	0.19	1.1	1.6
-11	68	0.017	2.1	9.4	16	-36	8.2	1.7	0.16	0.94	1.5
-12	82	0.023	1.8	8.1	15	-37	10	2.0	0.15	0.87	1.3
-13	100	0.025	1.6	7.7	14	-38	12	2.7	0.12	0.75	1.2
-14	120	0.028	1.5	7.3	12	-39	15	3.1	0.11	0.70	1.1
-15	150	0.032	1.4	6.8	11	-40	18	3.5	0.10	0.65	1.0
-16	180	0.042	1.2	6.0	10	-41	22	4.7	0.096	0.56	0.90
-17	220	0.048	1.1	5.6	9.2	-42	27	5.3	0.088	0.53	0.81
-18	270	0.055	1.0	5.2	8.0	-43	33	7.1	0.076	0.46	0.74
-19	330	0.072	0.96	4.6	7.4	-44	39	7.9	0.070	0.44	0.68
-20	390	0.079	0.84	4.4	6.8	-45	47	11	0.067	0.37	0.62
-21	470	0.11	0.72	3.7	6.2	-46	56	12	0.062	0.35	0.57
-22	560	0.12	0.64	3.5	5.7	-47	68	14	0.054	0.33	0.51
-23	680	0.14	0.62	3.3	5.1	-48	82	18	0.051	0.29	0.46
-24	820	0.18	0.60	2.9	4.7	-49	100	21	0.042	0.27	0.42
-25	1.0 mH	0.20	0.52	2.7	4.2						

TYPICAL Q CURVES (TYPE 7140/7150)

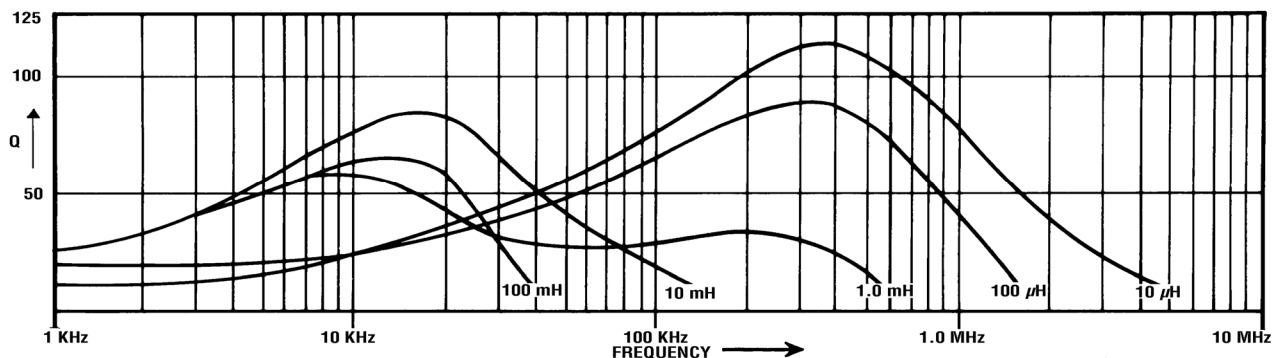

SEND YOUR REQUIREMENTS. PROMPT QUOTES.