


2011 Series

Pin Header 2.54mmX2.54mm(0.100"X0.100")

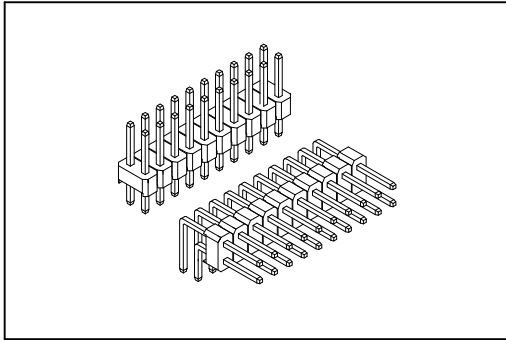

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V.

Insulator Resistance: 1000M Ω min.

Contact Resistance: 20m Ω max.

Operating Temperature: -40°C~+105°C.

Features:


* Available in Straight , Right Angle and Press Fit

* Side-to-side and end-to-end stackable.

* Custom design offered.

* Additional plating options available.

Mates with: 1001,2006,2041,2042,2043,2044,2045
2046,2047,2048,2049.

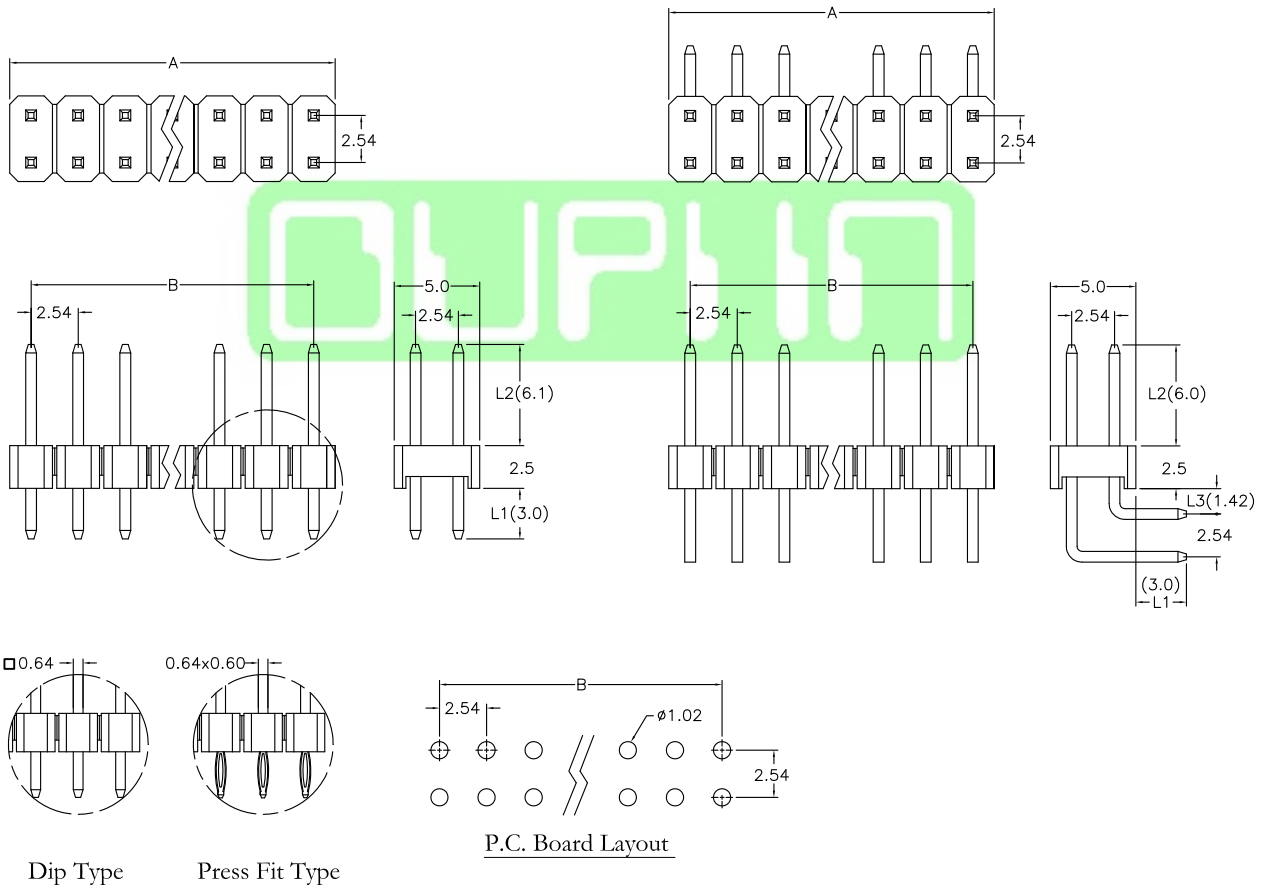

Position	4 Thru 80
Dimension	
A	2.54 X No. of Positions /2-0.25
B	2.54 X No. of Positions /2-2.54

Ordering information

2011- 2 X 40 G 00 S P B
Series Double Row No. of Pin Per Row G: Gold Plated 00: G/F S: Straight P: Blank: Dip Type B: Bulk Package
R: Right Angle P: Press Fit Type

Custom Design: Straight (i.e. 2011-2 X 40 G 00 S/L1 /L2)

Right Angle (i.e. 2011-2 X 40 G 00 R/L1 /L2 /L3)

L1: Dip Length

L2: Mating Length

L3: Extended Length (currently only 1.42mm available.)

* Consult factory for Right Angle press fit drawing.